



Product Features

- GaN on SiC Technology
- Surface Mount Hybrid Type
- Compact Size & Low Cost
- 50 Ohm Input/Output Impedance

Application

- S-Band Radar System



Package Type : UP-1F

Description

- HR2730-10A is FEM (Front End Module) operating at 2.7-3.0GHz performing 10W output power.
- Ant port switch provides duplexer function and has a built in Limiter Diode which protects receiver.
- Receiver switches between LNA-mode and Bypass-mode.
- AIN-board are utilized for thermal dissipation.
- Bias sequencing is required.

Electrical Specifications @ Ta=25°C, 50Ω System

PARAMETER		UNIT	MIN	TYP	MAX	Remark
Frequency		GHz	2.7	-	3.0	-
Pulse width		us	-	-	100	-
Duty Cycle		%	-	-	10	-
TX Input Power		dBm	-	17	-	-
TX Power Gain		dB	24.4	25	-	-
TX Peak Output Power		dBm	41.4	42	-	-
RX LNA S21 mean. Gain		dB	21.5	-	24.5	-
RX Bypass S21 mean. Gain		dB	-21	-	-19	-
RX LNA Noise Figure		dB	-	-	3.2	-
VSWR	TX S11	-	-	-	2	-
	RX LNA S11		-	-	2.5	-
	RX LNA S22		-	-	2.2	-
	RX Bypass S11		-	-	2.2	-
	RX Bypass S22		-	-	1.5	-
TX Efficiency		%	40	45	-	Pout @ Peak
Operating Voltage		V	DC +50V, DC +5V, DC +3V DC -3.3V, DC -5V			Control Condition Truth Table

- **Caution: The drain voltage must be supplied to the device after the gate voltage is supplied**

Turn on → Turn on the Gate voltage supply and last turn on the Drain voltage supplies

Turn off → Turn off the Drain voltage and last turn off the Gate voltage

Environmental Specifications

Operating Case Temperature	-30 °C to +85 °C
----------------------------	------------------

Mechanical Specifications

Dimension (W × D × H)	24mm X 14mm X 3.9mm
Weight	2.5 g


Pin Description

Pin No	Function	Description
1	Switch ANT Bias	Common Switch Control (TTL)
2	ANT Port	-
3	Switch RX Bias	Common Switch Control (TTL)
4	RX Bypass Path Enable	RX Bypass Path Control (LVTTL)
5	RX LNA Path Enable	RX LNA Path Control (LVTTL)
6	LNA Shut Down	LNA Shut Down Pin (LVTTL)
7	LNA Bias	LNA Operating Voltage Pin (TTL)
8	RX LNA Path Enable	RX LNA Path Control (LVTTL)
9	RX Output Port	-
10	RX Bypass Path Enable	RX Bypass Path Control (LVTTL)
11	TX Input Port	-
12	TX Drive Amp Bias	TX Drive Amp Operating Pin (TTL)
13	TX GaN Amp Vgs	TX GaN Amp Gate Bias (-3.3V & -5V)
14	TX GaN Amp Vds	TX GaN Amp Drain Bias (+50V)
15	Switch TRX Bias	Common Switch Control (TTL)


Control Condition Truth Table

Path	ANT Bias	RX Bias	TRX Bias	TX GaN Drain	TX GaN Gate	TX Drive Amp	LNA BIAS	LNA S/D	Bypass CTRL	RX Main CTRL
TX	5V	5V	0	50V	-3.3V	5V	5V	3V	3V	0
RX LNA		0	5V		-5V	0		0	0	3V
RX Bypass		0	5V		-5V	0		3V	3V	0


Block Diagram

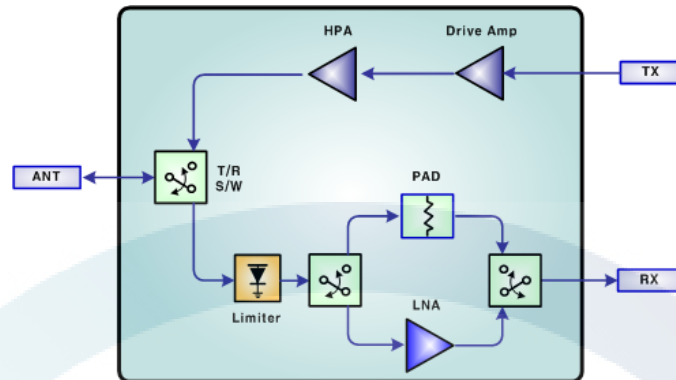

Package Dimension (Type : UP-1F)

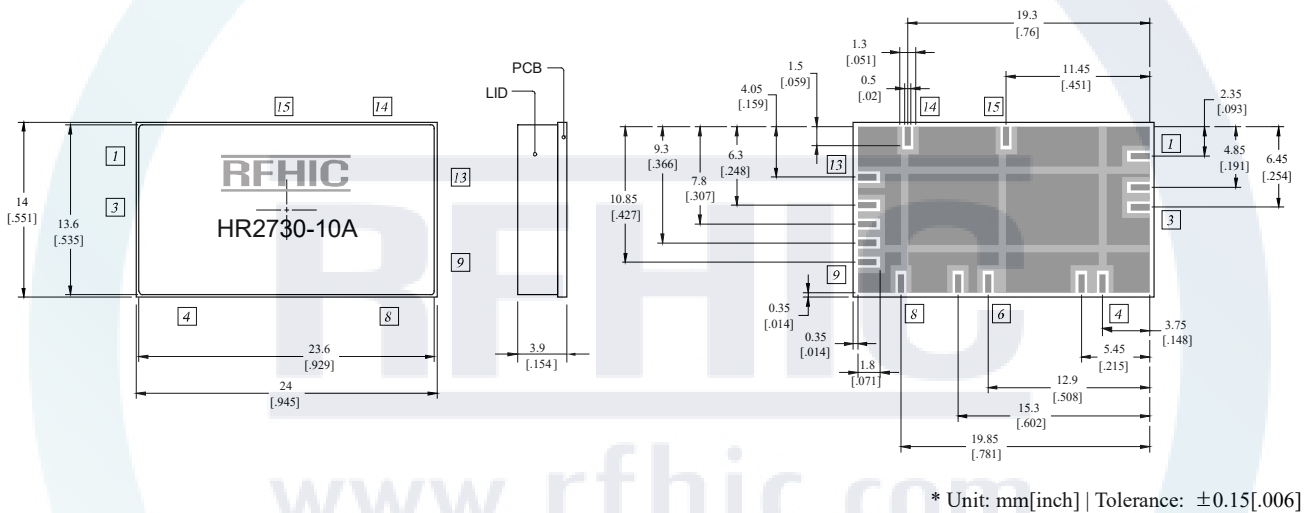

Recommended Pattern

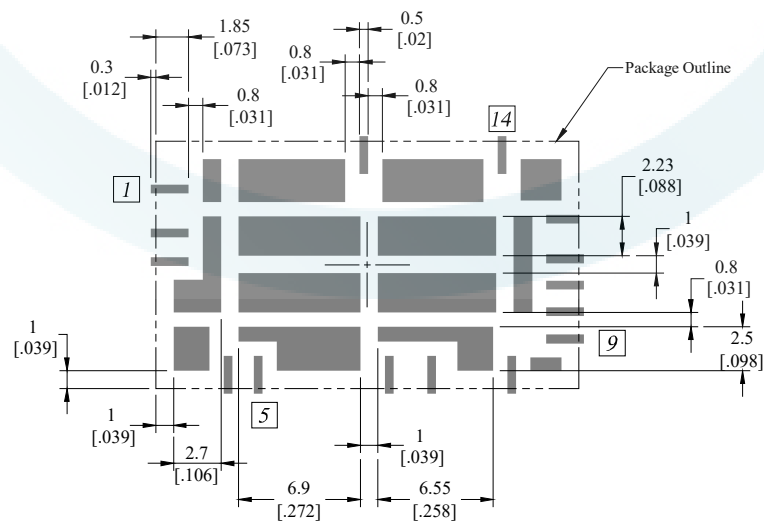

Precautions

This product is a Gallium Nitride Transistor.

The Gallium Nitride Transistor requires a Negative Voltage Bias which operates alongside a Positive Voltage Bias. These Biases are applied in accordance to the Sequence during Turn-On and Turn-Off.

The Pallet Amplifier does not have a built-in Bias Sequence Circuit. Therefore, users need to either apply positive voltages and negative voltages in the required sequence, or add an external Bias Circuit to this Amplifier.


The required sequence for power supply is as follows.

During Turn-On

1. Connect GND.
2. Apply V_{gs} .
3. Apply V_{ds} .
4. Apply the RF Power.

During Turn-Off

1. Turn off RF power.
2. Turn off V_{ds} , and then, turn off the V_{gs} .
3. Remove all connections.

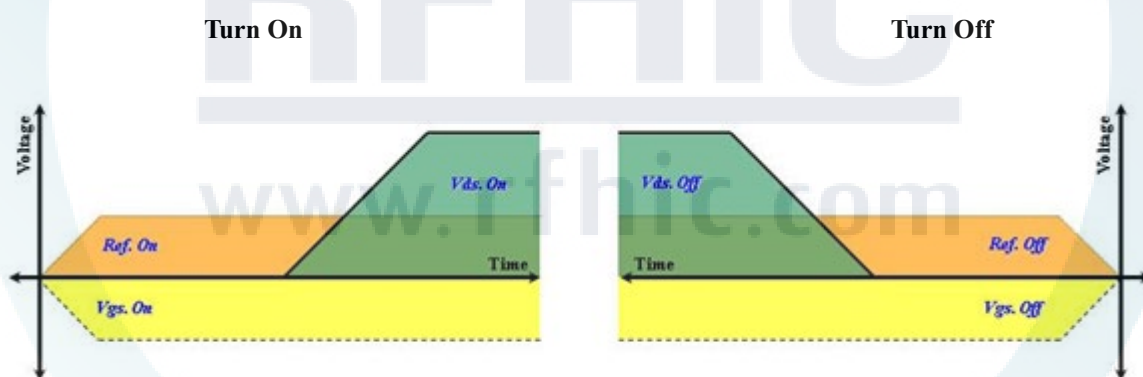

- Sequence Timing Diagram -

Ordering Information

Part Number	Package Design
HR2730-10A	-R (Reel)
	-B (Bulk)
	-EVB (Evaluation Board)

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
HR2730-10A	2020.01.10	1.0	Changed Lid Material	-
HR2730-10A	2018.03.15	0.4	Changed Specification	Preliminary
HR2730-10A	2018.03.13	0.3	Changed Specification	Preliminary
HR2730-10A	2017.12.26	0.2	Changed Specification	Preliminary
HR2730-10A	2017.08.16	0.1	The first written document	Preliminary

RFHIC
www.rfhic.com

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3000.