


### Product Features

- High Output Power : Pout =180W(Typ.)
- High Gain : GP =35dB(Typ.)
- High Efficiency : 40%(Typ.)
- High thermal stability
- Internally matched for ease of use
- 20% Duty Cycle, 2ms Pulse Width

### Applications

- Radar system



### Description

The RRP2735160-35 is designed for Radar system application frequencies from 2.7GHz to 3.5GHz and GaN HEMT technology has been used that performs high breakdown voltage, wide bandwidth and high efficiency. Since it is high efficiency amplifier, it can perform at max. 20% duty cycle and 2ms of pulse width.




### Electrical Specifications @ $V_{DS}=50V$ , $T=25^{\circ}C$ , 50 $\Omega$ System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	2700	3100	3500	$f_O$
Operating Bandwidth	MHz	-	800	-	BW
Output Pulse Power	W	160	180	-	$P_O$
Input Pulse Power	dBm	-	18	-	$P_I$
Power Gain	dB	34	35	-	$G_P$
Gain Flatness	dB	-	0.5	1.0	$\Delta G_P$
Duty Cycle	%	-	10	20	DC
Pulse Width	us	-	100	2000	PW
Efficiency	%	35	40	-	$E_{ff}$
Amplitude Pulse Droop	dB	-	0.5	1.0	Droop
Harmonics 1 to N	dBc	20	30	-	$H_N$
Spurious Level	dBc	60	-	-	Spur
Rise Time	ns	-	-	200	$t_r$
Fall Time	ns	-	-	200	$t_f$
Phase Deviation	°	-20	-	20	$\Delta\phi$

\* Above electrical specifications is measured by connecting electrolytic condenser 1,000uF to DC. Please make sure that electrolytic condenser is connected properly while testing the module.

\* Custom design available

Typical Performance @ 25°C

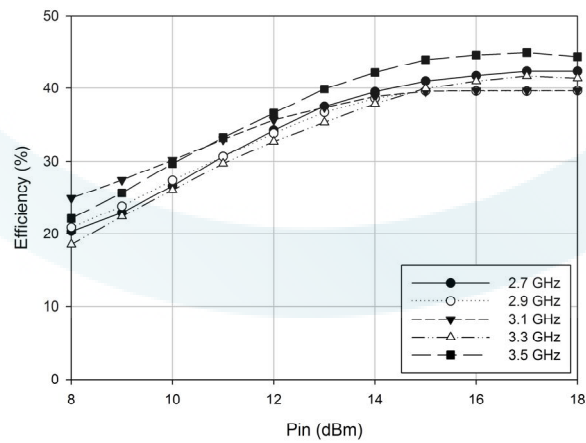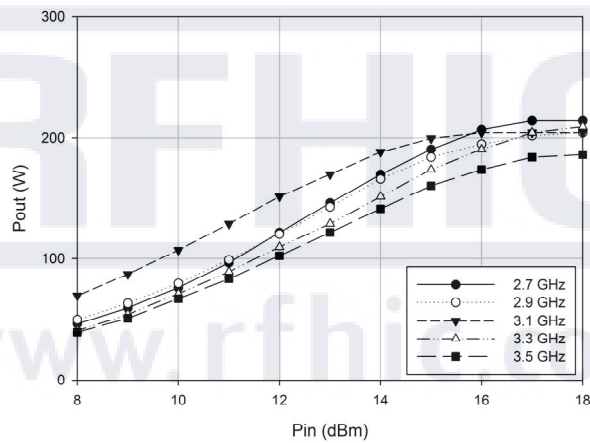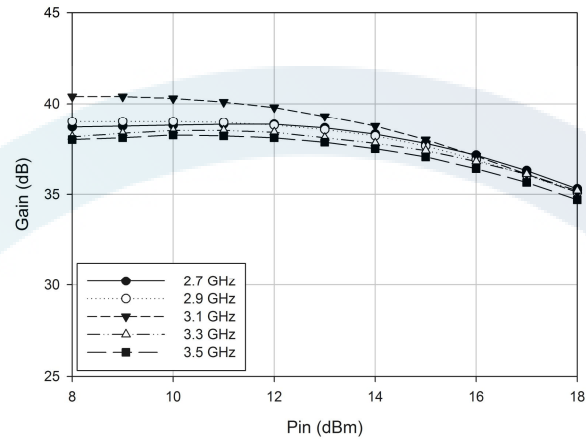

### Absolute Maximum Ratings

PARAMETER	UNIT	RATING	SYMBOL
Gate-Source Voltage	V	-10 ~ 0	$V_{GS}$
Drain- Source Voltage	V	110	$V_{DS}$
Gate Current	mA	70	$I_G$
Operating Junction Temperature	°C	225	$T_J$
Operating Flange Temperature	°C	-20 ~ 100	$T_C$
Storage Temperature	°C	-50 ~ 150	$T_{STG}$

### Operating Voltages


PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Drain-Source Voltage	V	50	± 2%	$V_{DS}$
Gate-Source Voltage	V	-4(ON) , -8(OFF)	± 2%	$V_{GS}$

### Power Supply

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Drain-Source Current(AVG)	A	-	1	1.5	$I_{DS}$

\* Duty Cycle 10%, Pulse Width 100us

### Block diagram

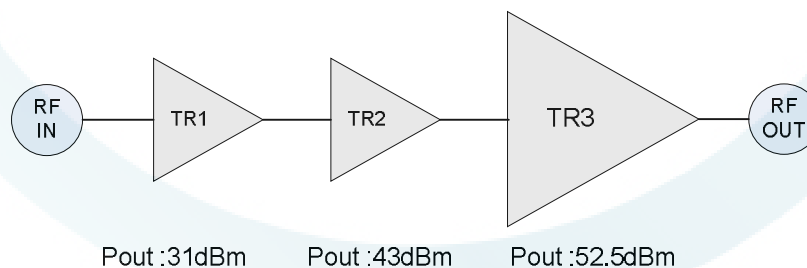

## Precautions

This product is a Pulse Amplifier based on a Gallium Nitride Transistor.

The Gallium Nitride Transistor requires a Negative Voltage Bias which operates alongside a Positive Voltage Bias. These Biases are applied in accordance to the Sequence during Turn-On and Turn-Off.

The Pallet Amplifier does not have a built-in Bias Sequence Circuit. Therefore, users need to either apply positive voltages and negative voltages in the required sequence, or add an external Bias Circuit to this Amplifier.


The required sequence for power supply is as follows.

## During Turn-On

1. Connect GND.
2. Apply -4V to  $V_{GS}$ .
3. Apply 50V to  $V_{DS}$ .
4. Turn on the  $V_{GS}$ , and then, turn on the  $V_{DS}$ .
5. Apply the RF Power.

## During Turn-Off

1. Turn off RF power.
2. Turn off  $V_{DS}$ , and then, turn off the  $V_{GS}$ .
3. Remove all connections.

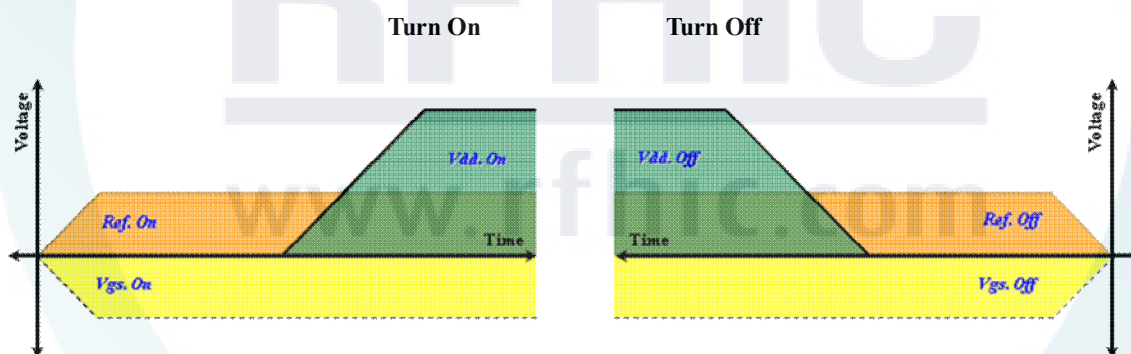


- Sequence Timing Diagram -

## Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	0.06
Dimension	mm	76 x 25 x 14
RF Connector	-	50 ohm SMA Connector: RF Input
		50 ohm SMA Connector: RF Output
DC Connector	-	3pin Molex Connector (Male) : Supply

**Outline Drawing**

\* Unit: mm[inch] | Tolerance  $\pm 0.2$ [.008]

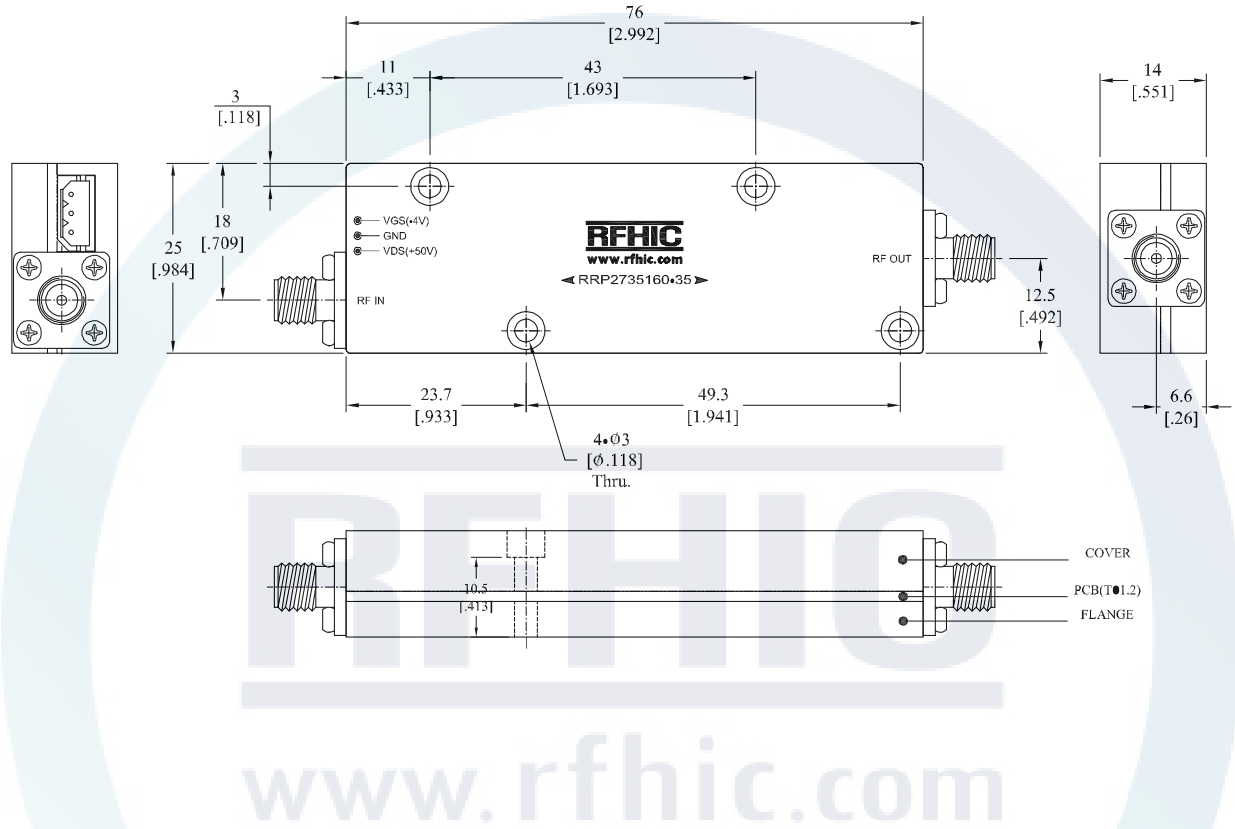

**Pin Description**

Pin No	Description	Pin No	Description
1	V <sub>GS</sub> (-4V)	3	V <sub>DS</sub> (+50V)
2	GND	-	-

**Revision History**

Part Number	Release Date	Version	Modification	Data Sheet Status
RRP2735160-35	2014.02.14	0.1	-	Preliminary



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.