



Product Features

- 50 ~ 3000MHz
- GaAs MMIC
- 43dBm Output IP3
- 14.0dB Gain
- 22dBm P1 dB
- Single +5V Supply
- SOT-89 SMT Package

Applications

- CDMA, W-CDMA Medium Power Amplifier
- High Linearity Drive Amplifier



Package Type : SOT-89

Description

AP205A is a high linearity amplifier designed with GaAs MMIC in a low cost SOT-89 package. It is designed for applications such as GSM, CDMA, W-CDMA drive devices which require high IP3.

Electrical Specifications @ Ta=+25 °C, V_{DD}=+5V, Fc=900 MHz

PARAMETER	UNIT	MIN	TYP	MAX
Gain	dB	12	14	-
Input Return Loss	dB	-	-17	-
Output Return Loss	dB	-	-15	-
Output IP3	dBm	38	43	-
1dB Compression Point	dBm	-	22	-
Noise Figure	dB	-	2.3	-
DC Current	mA	90	115	140
Supply Voltage	VDC	-	5V	-
Thermal Resistance (Rth)	°C/W	-	-	50

OIP3 is measured with two tones, at an output power of +10dBm/tone separated by 1MHz


Absolute Maximum Ratings

PARAMETER	UNIT	MIN	MAX
Device Voltage	VDC	-	9
RF Input Power	dBm	-	7
Storage Temperature	°C	-40	150

Operating Ranges

PARAMETER	UNIT	MIN	TYP	MAX
Operating Frequency	MHz	50	-	3000
Device Voltage	VDC	-	5	6
Case Temperature	°C	-40	-	85


Application Circuit @ 900MHz

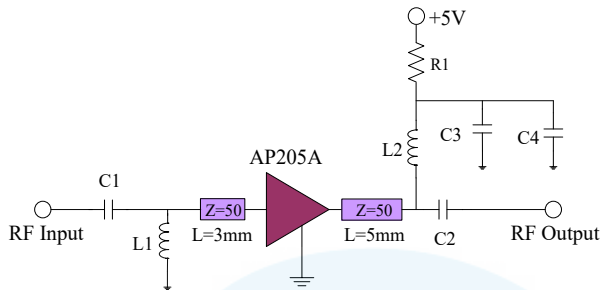


Bill of Material

PARAMETER	TYP	PARAMETER	TYP
C1	51 pF	L1	8.2 nH
C2	330 pF	L2	18 nH
C3	100 pF	R1	0 Ω
C4	0.1 uF		


S-Parameter vs. Frequency

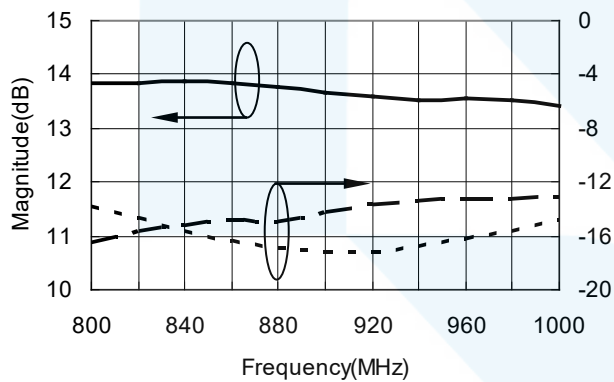


OIP3 vs. Frequency

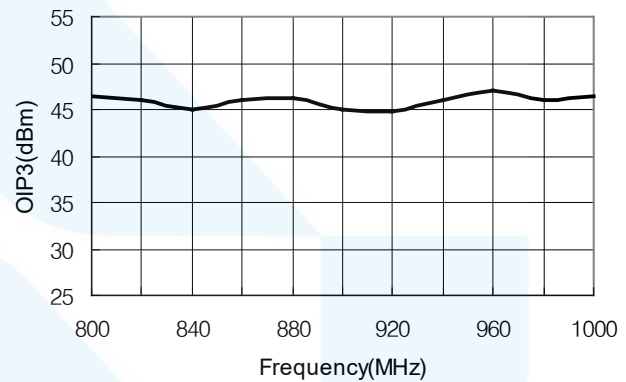


Noise Figure vs. Frequency

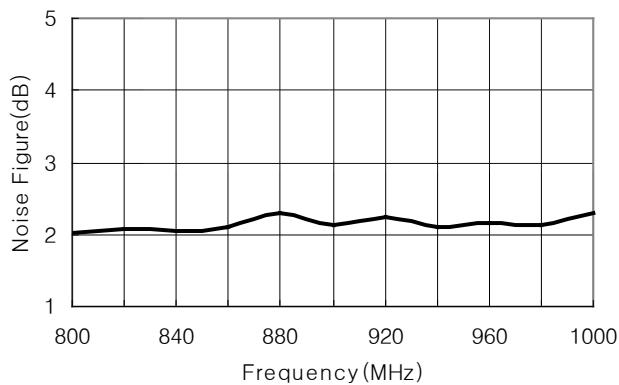

P1dB vs. Frequency

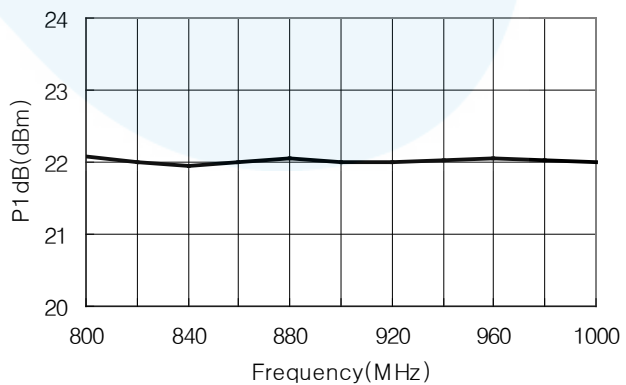


Application Circuit @ 1800MHz

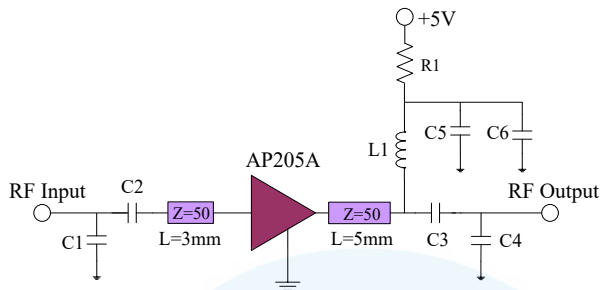


Bill of Material

PARAMETER	TYP	PARAMETER	TYP
C1	2.0 pF	C6	0.1 uF
C2,C3	100 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω
C5	100 pF		


S-Parameter vs. Frequency

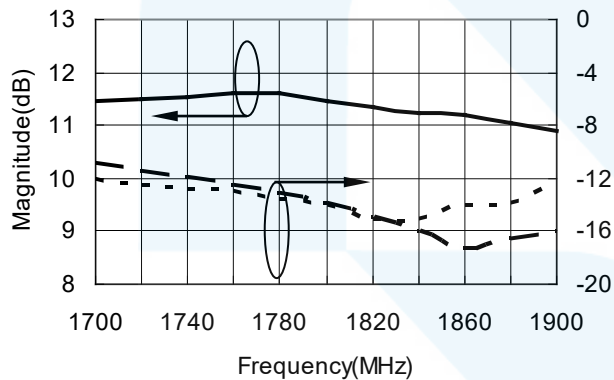


OIP3 vs. Frequency

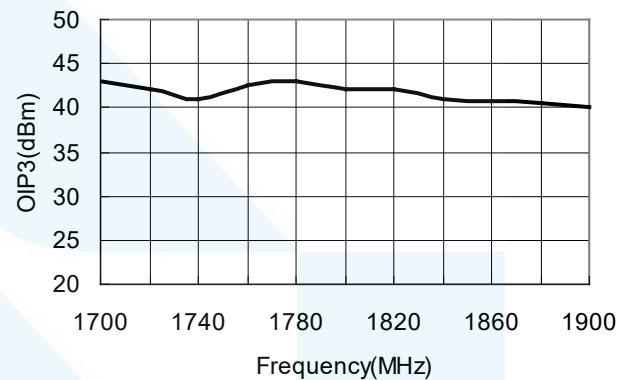


Noise Figure vs. Frequency

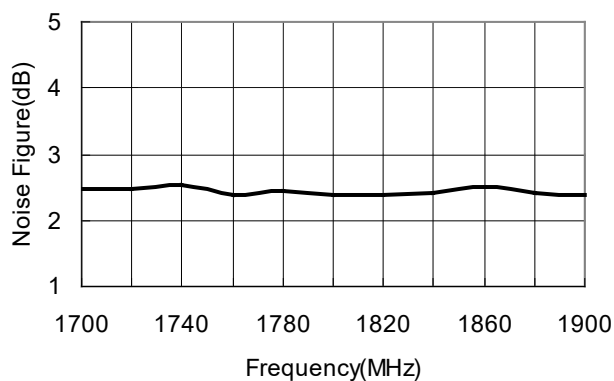

P1dB vs. Frequency

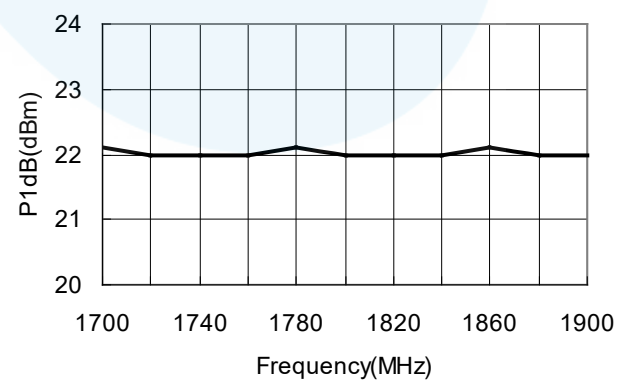


Application Circuit @ 2100MHz

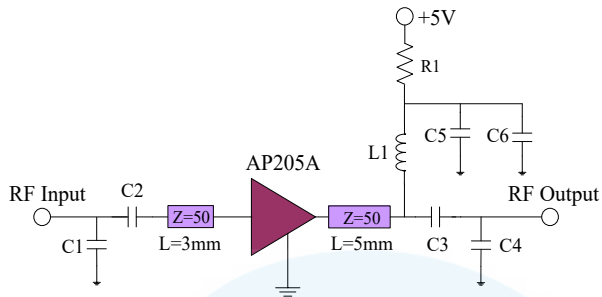


Bill of Material

PARAMETER	TYP	PARAMETER	TYP
C1	1.5 pF	C6	0.1 uF
C2 ,C3	100 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω
C5	100 pF		


S-Parameter vs. Frequency

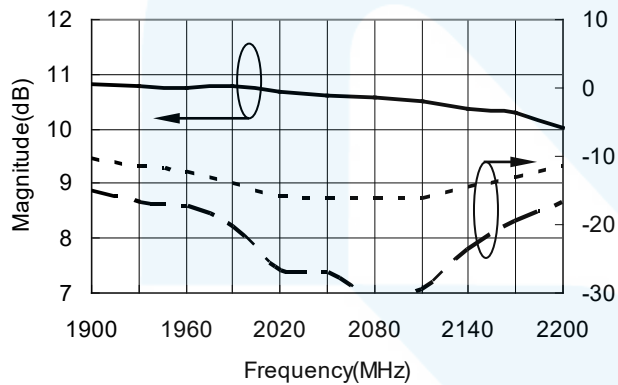


OIP3 vs. Frequency

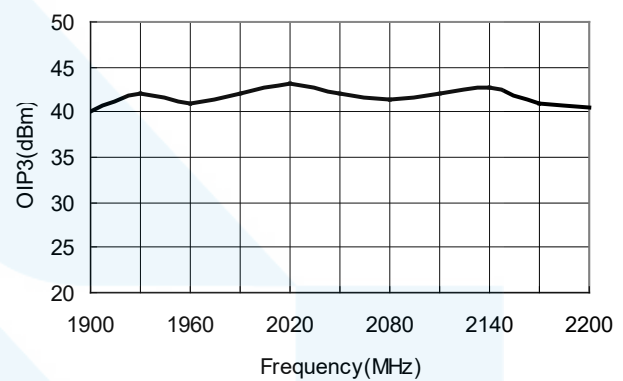


Noise Figure vs. Frequency

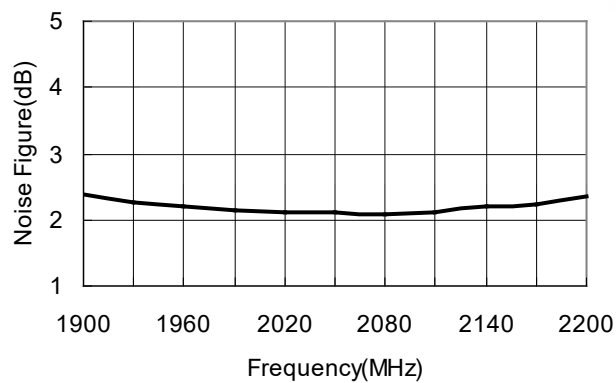

P1dB vs. Frequency

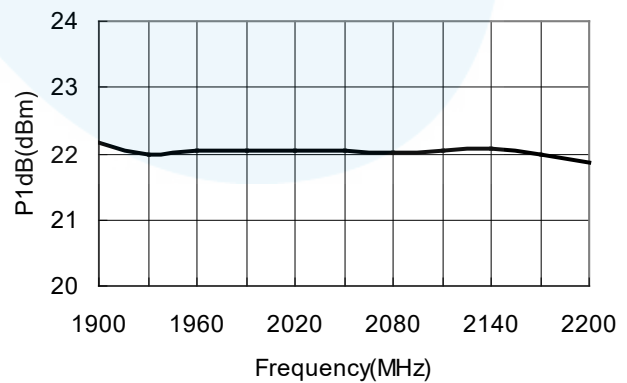


Application Circuit @ 2300MHz

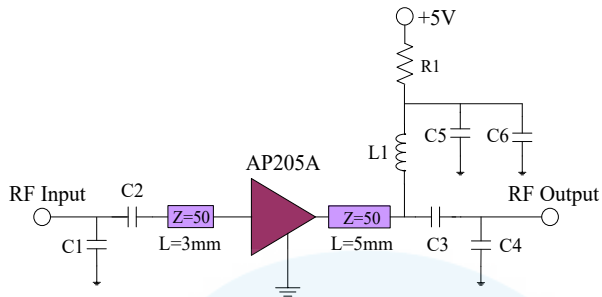


Bill of Material

PARAMETER	TYP	PARAMETER	TYP
C1	1.5 pF	C5	100 pF
C2	33 pF	C6	0.1 uF
C3	39 pF	L1	18 nH
C4	1.0 pF	R1	0 Ω


S-Parameter vs. Frequency

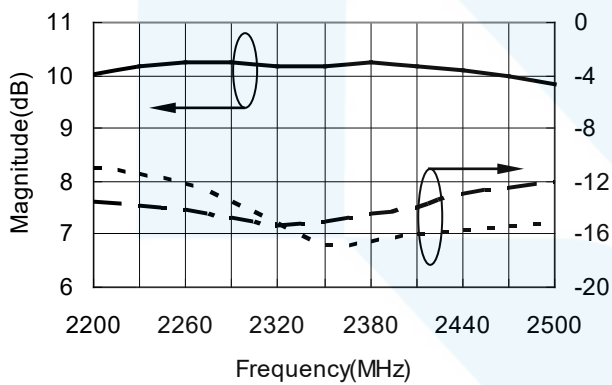


OIP3 vs. Frequency

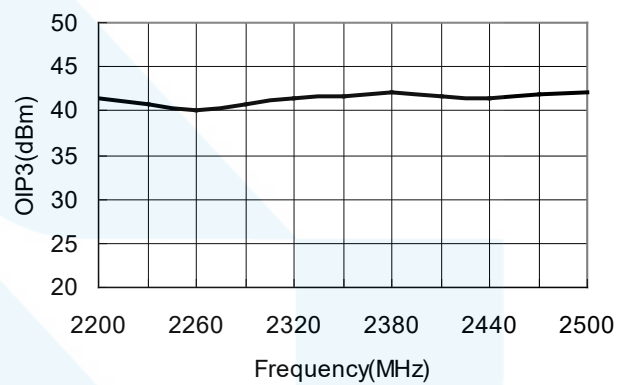


Noise Figure vs. Frequency

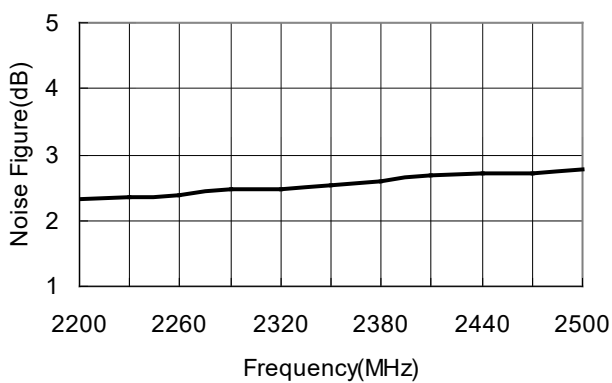

P1dB vs. Frequency

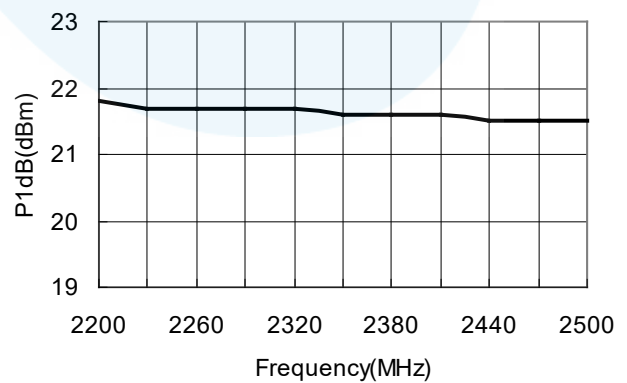


Application Circuit @ 2600MHz

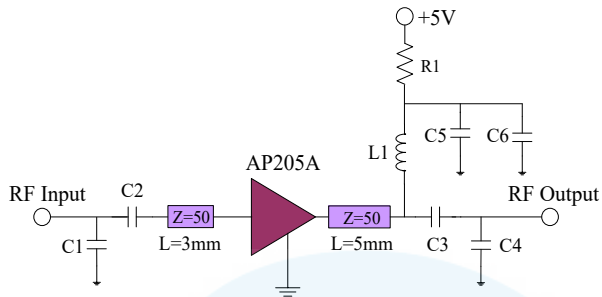


Bill of Material

PARAMETER	TYP	PARAMETER	TYP
C1	1.5 pF	C5	100 pF
C2	8.0 pF	C6	0.1 uF
C3	15 pF	L1	18 nH
C4	0.5 pF	R1	0 Ω


S-Parameter vs. Frequency

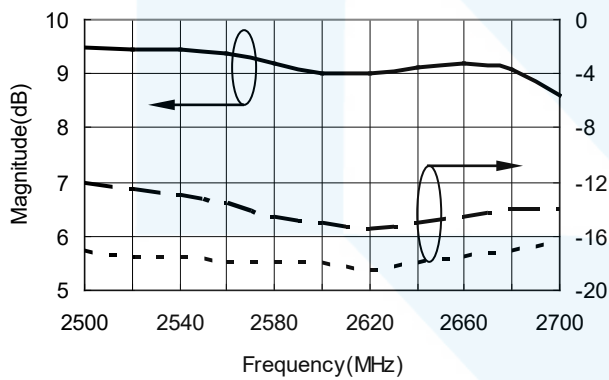


OIP3 vs. Frequency

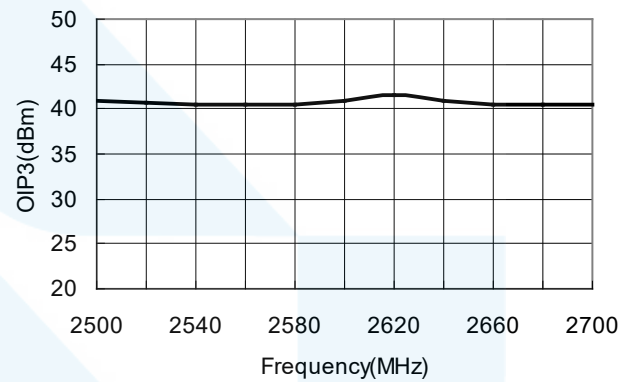

Noise Figure vs. Frequency

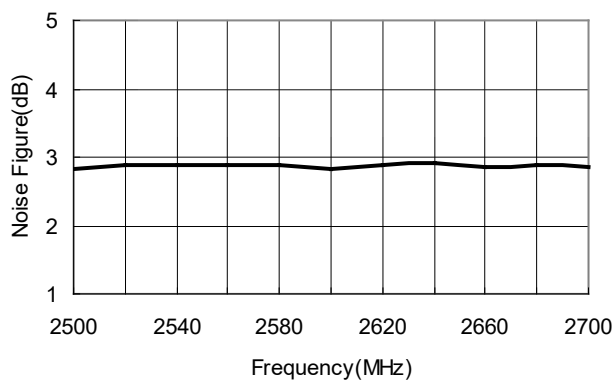


P1dB vs. Frequency

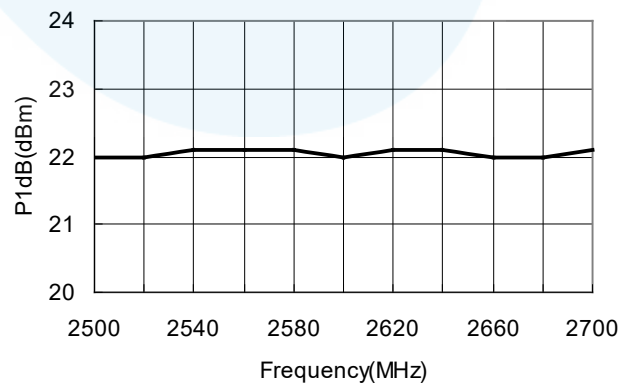


Package Dimensions (Type: SOT-89)

* Unit: mm[inch] | Tolerance ± 0.2 [.008]

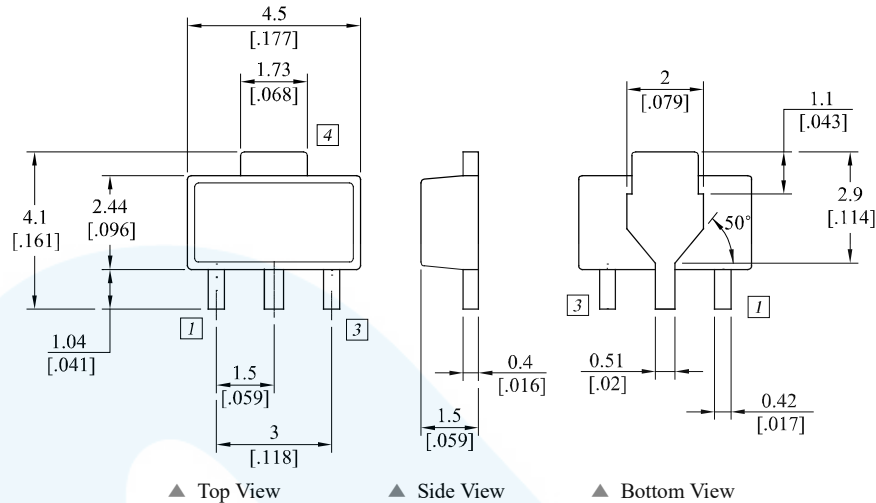


Pin Description			
Pin No	Function	Pin No	Function
1	Input	4	GND
2	GND	-	-
3	Output / Bias	-	-

Recommended Pattern

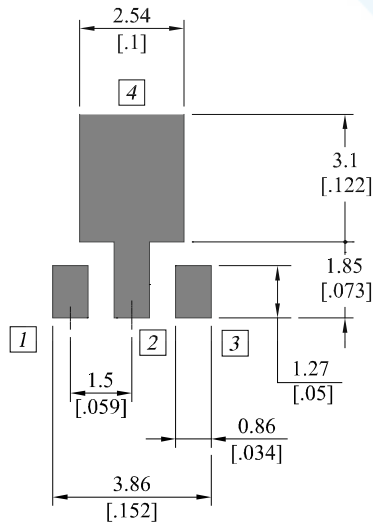

Recommended Mounting Configuration

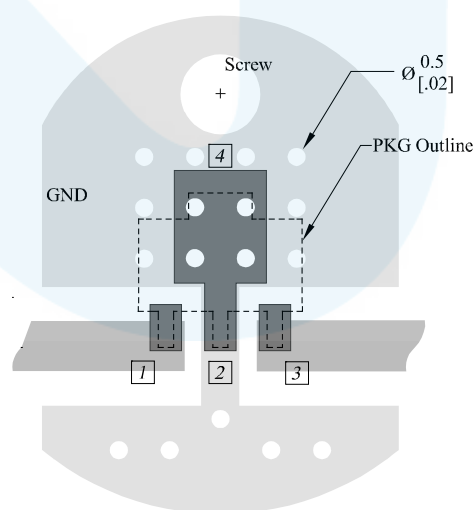

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
AP205A	2012.10.15	6.2	Change by a new document form	-

**Certification**

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>