

Preliminary

GaN Microwave Generator

RIK0960K0-40TG



Product Features

- 900 ~ 930MHz
- High Output power : 60kW(CW) Peak Power
- Using GaN on SiC HEMT
- 60% System Efficiency
- High reliability & stability, long-run operation
- High frequency-stability with PLL technology
- Digital Adjustability of Power, Frequency, Phase

Applications

- Building block for high-power systems
- Plasma generation
- Industrial Heating and Drying
- Microwave CVD
- Microwave sintering
- Microwave chemistry
- Materials processing
- Study of biological phenomena



Description

The RIK0960K-40TDG is a 60kW, GaN solid-state microwave generator designed ideally for microwave heating and plasma generation applications. The RIK0960K-40TDG is a combined microwave generator providing continuous wave (CW) and or pulse output power adjustable from 1000W to 60,000W at frequencies ranging between 900MHz and 930MHz. The RIK0960K-40TDG is a turn-key microwave generator solution that comes pre-equipped with thirty-two GaN solid-state power amplifiers, a 162kW 380VAC power supply unit, a main control module (PLL Synthesizer), and a Window-based GUI software.

Electrical Specifications

PARAMETER		UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	Adjustable Range	MHz	900		930	F _o
	Step Size	kHz	500			F _{step}
Output Power	Adjustable Range	kW	1		60	P _o
	Step Size	kW	0.1			P _{step}
Operating Mode		CW and or Pulse				
Power Spectrum Bandwidth**		kHz	-	-	500	S _b
Frequency Accuracy & Stability		ppm	-2.5	-	2.5	F _s
Efficiency (DC to RF)		%	-	-	60	Eff
Operating Voltage	PSU	V	380	-	415	VAC
	SSPA Head		-	50	-	VDC
Phase Shift	Operating Range	Deg	0	-	360	-
	Step Size	Deg	-	5.6	-	-
Pulse Mode	Duty Repetition Frequency	kHz	0.01	-	50	-
	Pulse Length	ms	0.02	-	100	-
	Pulse Width	us	20	-	-	-

Preliminary
GaN Microwave Generator
RIK0960K0-40TG
Generator Alarm & Protection Features



PARAMETER	State	CONDITION
Output Power	Alarm	Output Power > 60kW
Over-Temperature	Alarm	System Temperature > 60 C°
Reflected Power	Alarm	Reflected Power > 12kW
PLL Unlock ⁽¹⁾	Disabled	
Over-Temperature	Disabled	System Temperature > 55 C°
Reflected Power	Disabled	Reflected Power > 15kW
Water Temp	Disabled	System Temperature > 28 C°
Water Flow	Disabled	System Flow < 80L/min

***Remarks**

(1) A phase-locked loop (PLL) is a control system that generates an output signal whose phase is related to the phase of the input signal. The PLL is equipped with a voltage-driven oscillator that constantly adjusts to match the frequency of the input signal.

Mechanical Specifications

PARAMETER	UNIT	VALUE
Dimensions (W x D x H)	mm	1556 x 1006 x 2046
Weight	Kg	1000
Microwave Output Port	-	WR975
DC & GND	-	3P4W Lug Terminal
I/O Connector		USB, D-Sub 9-Pin, Ethernet
Cooling Requirements	-	Water Cooling Rate 100L/Min, 5Bar
		Cooling Water Inlet Temperature 20 °C~25°C (typ.)
		Relative humidity below dew point (non-condensing)
		* De-ionized water shall be used to prevent system damage
Fluid Inlet/Outlet Size	Inch	1" Tapered Pipe Thread

Remarks: Dimensions and Connectors may be subject to change.

Environmental Specifications

PARAMETER	UNIT	VALUE
Operating Case Temperature ⁽¹⁾	°C	15~50
Environmental/Storage Temperature	°C	10 ~ 40


***Remarks**

(1) Operating case temperature is the temperature detected at the PA temp sensor.

Preliminary
GaN SSPA Microwave Generator
RIK0960K-40TDG



Generator Dimension

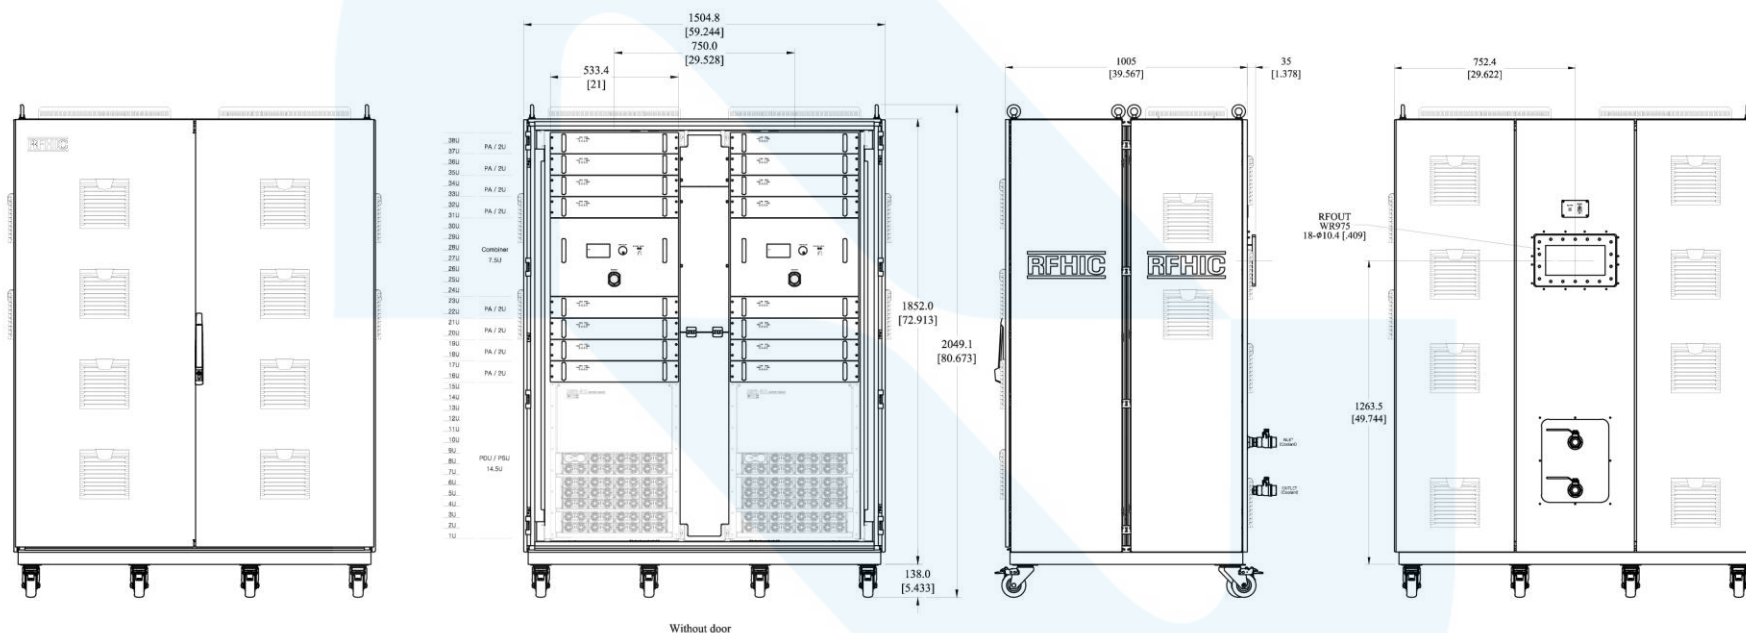

Preliminary
GaN SSPA Microwave Generator
RIK0960K-40TDG



Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RIK0960K-40TDG	January, 2022	0.1	Initial release of datasheet	Preliminary
RIK0960K-40TDG	October, 2022	0.2	Step size revised, Dimension layout edit	Preliminary



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>