



Product Features

- 2400 ~ 2500MHz (ISM band)
- 550W CW Peak Power @ 50V
- 55% Drain Efficiency @ 50V
- Excellent Ruggedness
- Excellent Thermal Stability

Applications

- Industrial Heating and Drying
- Scientific
- Medical
- Plasma Lighting



Description

The RNP24550-21 is designed for Industrial, Scientific, Medical (ISM) and Plasma Lighting applications at 2450MHz. This Amplifier is suitable for use in CW, pulse and linear applications. This high efficiency rugged device is targeted to replace Industrial magnetrons and other vacuum tubes currently powering industrial heating, drying, plasma lighting and medical systems.

Electrical Specifications @ $V_{DS}=50V$, $T=25^{\circ}C$, 50 Ω System

PARAMETER		UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency		MHz	2400	-	2500	f _o
Operating Bandwidth		MHz	-	100	-	OBW
CW Output Power		dBm	57.4	-	-	P _o
Input Power		dBm	-	14.4	-	P _i
Power Gain		dB	43	-	-	G _P
Gain Flatness		dB	-	-	±0.5	G _F
Input Return Loss		dB	-	-	-10	S ₁₁
Operating Voltage		V	V _{DC1} : 5.6±1%			-
			V _{DC2} : 50 ±1%			
Current Consumption	5.6V	-	-	0.1	0.15	IDD
	50V		-	20	-	
Efficiency @ 57.4dBm		%	55	-	-	Eff
Forward & Reverse Power Detector		V	3.0 ~ 4.0V (Pout:50~57.4dBm)			-
Temp Detector		V	0.9V @ 40°C (1°C/0.01V)			-

* Custom design available

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Case Temperature	°C	0	-	65	Ta
Storage Temperature	°C	-40	-	100	Tstg
Relative humidity w/o condensation	%	-	-	95	RH

Mechanical Specifications


PARAMETER	UNIT	VALUE
Dimensions (L x W x H)	mm	240 x 198 x 26
Weight	Kg	1.15
RF Input Connector	-	SMA (Female)
RF Output Connector	-	N-type (Female)
I/O Connector	-	D-sub 7W2 (CONEC)
Cooling	-	External Heat-sink & Airflow

RFHIC
www.rfhic.com


Typical CW Performance Charts

* Bias condition (VDS=50V, Tc=25°C)


Peak Power, Drain Efficiency vs. Frequency

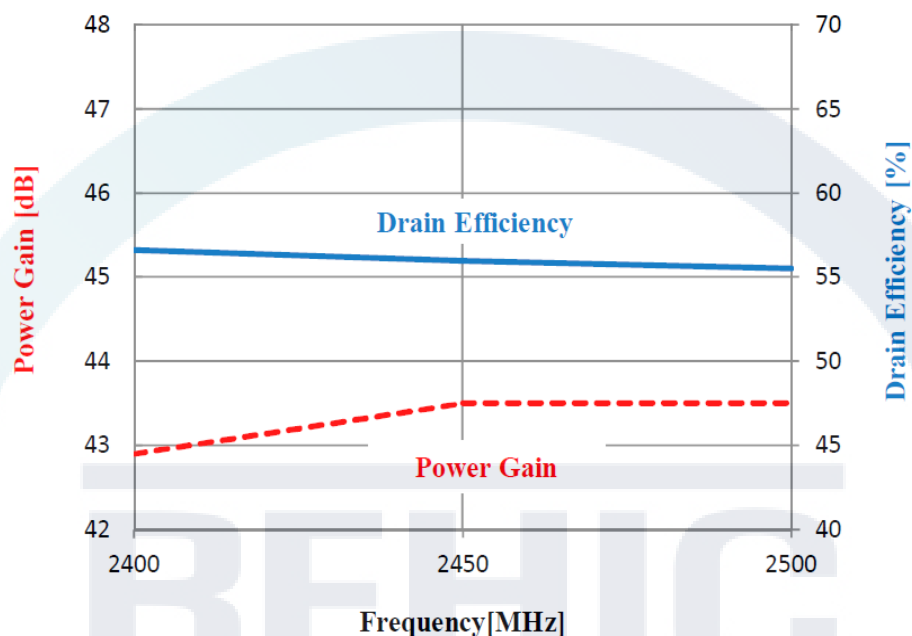

Power Gain, Drain Efficiency vs. Frequency

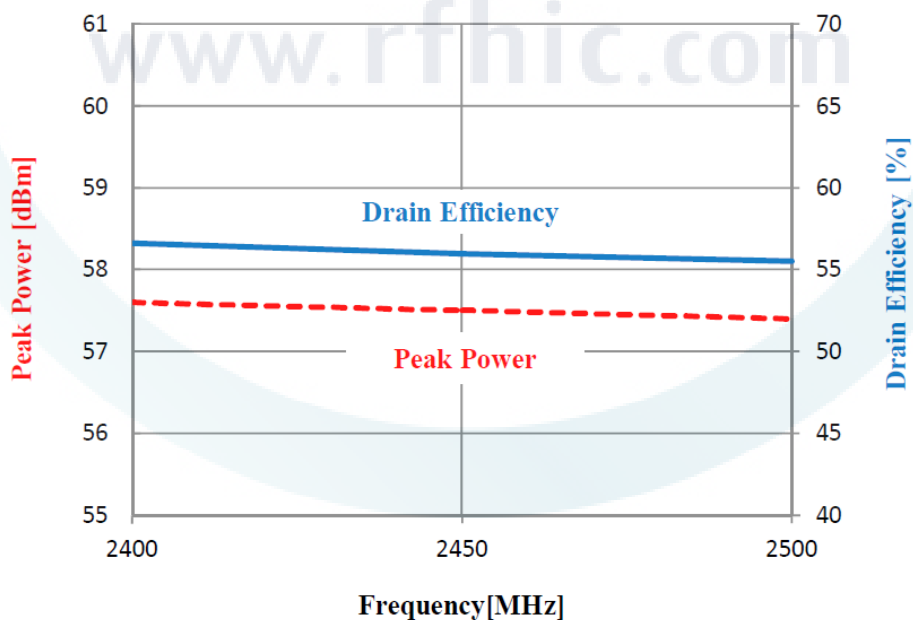


Block Diagram

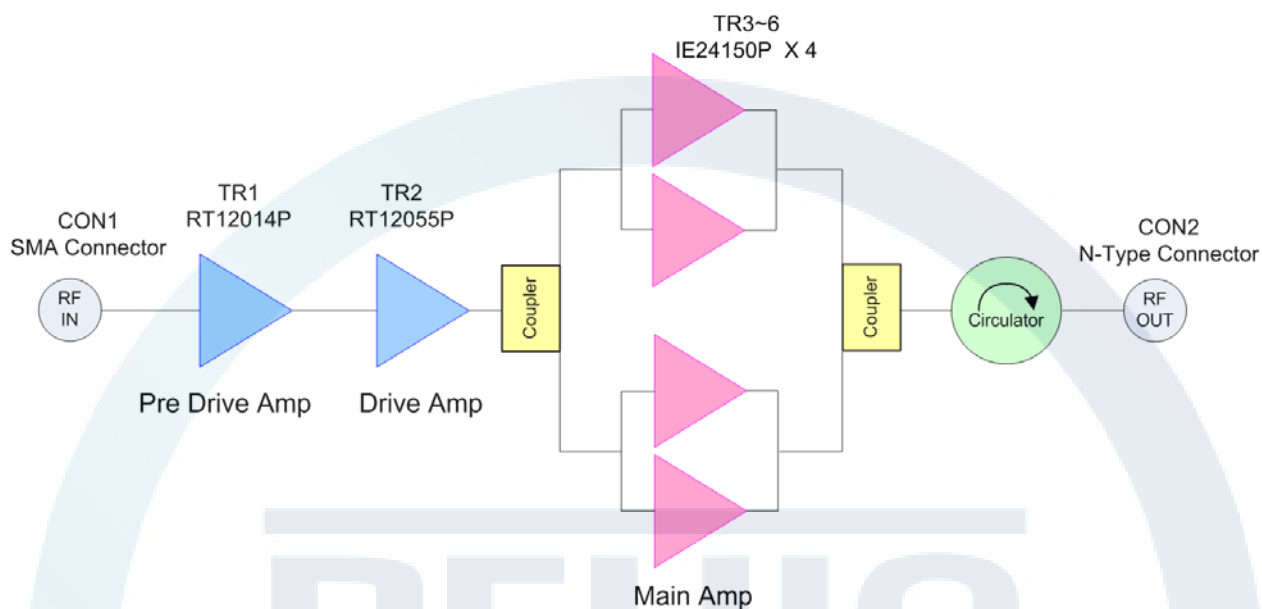

Characteristic	Unit	RF IN	Variable Attenuator	Pre Driver GaN Amplifier	Driver GaN Amplifier	Symmetric Amplifier	Circulator	RF Out
Pout @ P _{SAT}	dBm	14.4	11.4	28.2	43.4	57.9	-0.5	57.4
Power Gain @ P _{SAT}	dB	-	-3	16.8	15.2	14.5	-0.5	43
Current	A	-	-	0.4	1.6	18	-	20
Efficiency	%	-	-	67.5	68.7	62.4	-	55
Package (or Size)	mm	-	-	NS-CS01	NS-CS01	NS-AS01	25.4*25.4	-

Outline Drawing

* Unit: mm | Tolerance: ± 0.2

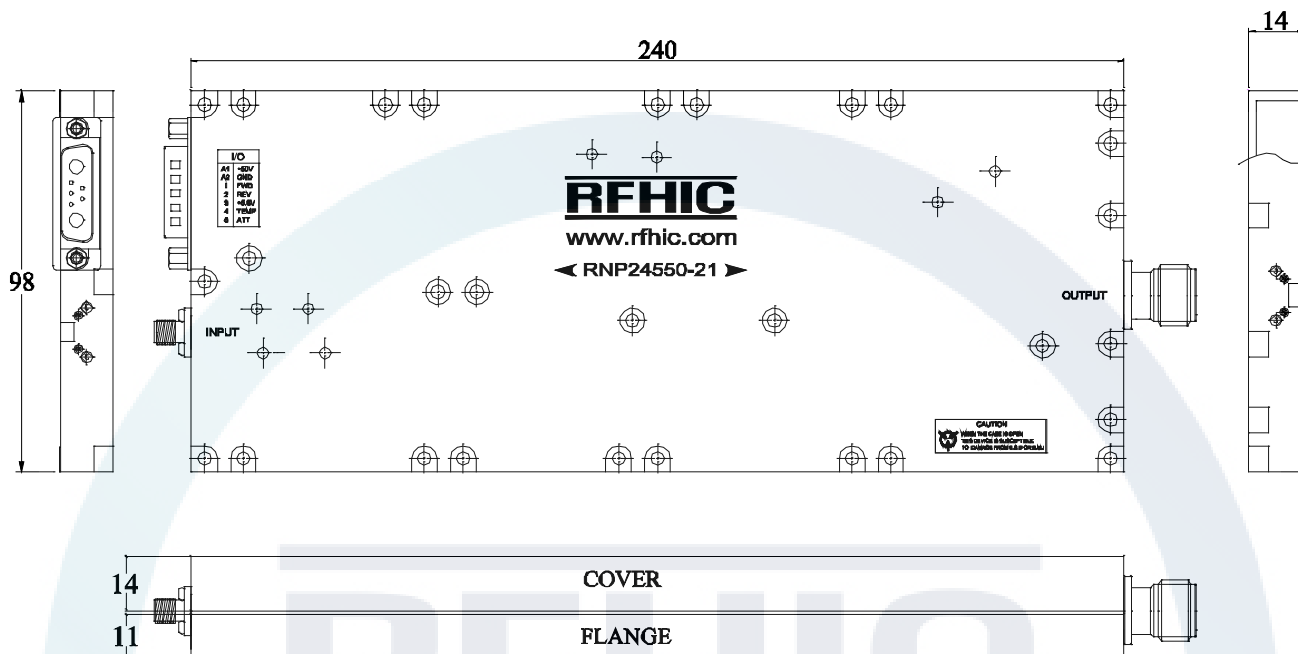

Note

Connector positions and module mount holes may be subjected change.

Interface Connector

7 Pin-Control (7W2)

Pin No	Description
A1	+50V
A2	GND
1	Forward power detecting
2	Reverse power detecting
3	+5.6V
4	Temperature monitor
5	0 ~+5V (Analog ATT)

Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RNP24550-21	Mar, 2018	1.0	Initial release of datasheet	-
RNP24550-21	Sep, 2018	2.0	Modify Operating Case Temperature	-



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.