

Preliminary
Pulse Amp Pallet
RRP0711020-38



Product Features

- Frequency from 750 ~ 1100MHz
- GaN HEMT
- 50 Ohm Input/Output impedance

Applications

- Radar system

Description

The RRP0711020-38 is designed for Radar system application frequencies from 750 ~1100MHz.
This module uses GaN HEMT technology which performs high breakdown voltage.

Electrical Specifications @ $V_{DS1}=50V$, $V_{DS2}=6V$, $T=25^{\circ}C$, 50 Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	750	-	1100	f_o
Operating Bandwidth	MHz	-	350	-	BW
Output Pulse Power	W	20	25	-	P_o
Input Pulse Power	dBm	-	5	-	P_i
Power Gain	dB	-	39	-	G_p
Gain Flatness	dB	-	-	± 1.5	ΔG_p
Duty Cycle	%	-	-	2	DC
Pulse Width	us	-	-	10	PW
Amplitude Pulse Droop	dB	-	-	0.4	Droop
Harmonics 1 to N	dBc	15	-	-	H_N
Spurious Level	dBc	60	-	-	Spur
Rise Time	ns	-	-	100	t_r
Fall Time	ns	-	-	100	t_f
Input VSWR	dB	-	-	2:1	VSWR
Output VSWR	dB	-	-	2:1	VSWR
Switching Time	us	-	-	1.0	t_{sw}
Phase Deviation	°	-20	-	+20	$\Delta\phi$

* Test Pulse conditions = 10us, 2%

* Custom design available

Absolute Maximum Ratings

PARAMETER	UNIT	RATING	SYMBOL
Operating Flange Temperature	°C	-20 ~ 85	T _C
Storage Temperature	°C	-40 ~ 105	T _{STG}

Operating Voltages

PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Drain-Source Voltage	V	50	± 2%	V _{DS1}
Drain-Source Sub Voltage	V	6	± 2%	V _{DS2}
Pulse On/Off Control Voltage	V	TTL Low(0V) : PA OFF, TTL High(5V) : PA ON		
Temp Monitor Voltage	V	0.75V@25°C (1°C/0.01V)		

Power Supply

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Drain-Source Current(AVG)	A	-	0.4	-	I _{DS1}
Drain-Source Sub Current(AVG)	A	-	0.01	-	I _{DS2}


* Duty Cycle 2%, Pulse Width 10us, Pout 25W

www.rfhic.com

Preliminary
Pulse Amp Pallet
RRP0711020-38



Block diagram

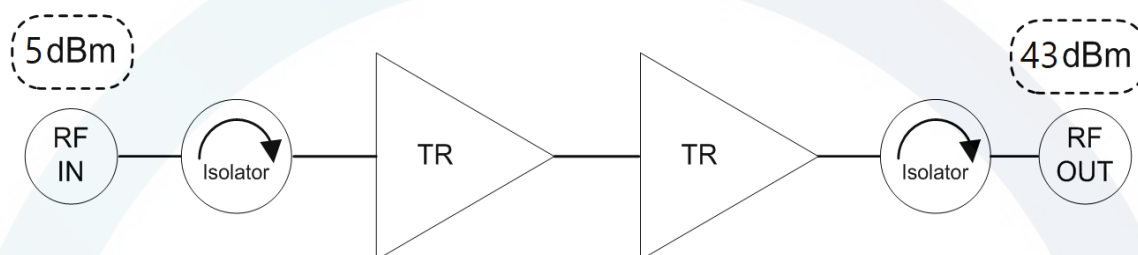


Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	0.4
Dimension	mm	150 x 60 x 23 (without connectors)
RF Connector	-	SMA Female : RF Input
		SMA Female : RF Output
DC Connector	-	7W2 Combo Connector : Supply and Control

RFHIC

* Unit: mm[inch] | Tolerance $\pm 0.3[.012]$



4 / 6

Pin Description

Supply : 7W2 Combo Connector			
Pin No	Description	Pin No	Description
A1	+50V (V_{DS1})	1	N.C
A2	GND	2	Temp Monitor
		3	Pulse On/Off
		4	+6V (V_{DS2})
		5	GND

Bias Sequence

HPA turn-on	HPA turn-off
1. Pin A1 : +50V DC (V_{DS1}) , ON	1. RF Signal , OFF
2. Pin 5 : +6V DC (V_{DS2}) , ON	3. Pin 3 : Pulse on/off , OFF
3. Pin 3 : Pulse on/off , ON	4. Pin 5 : +6V DC (V_{DS2}) , OFF
4. RF Signal , ON	5. Pin A1 : +50V DC (V_{DS1}) , OFF

* It is recommended to follow the sequence of bias application as in the above table. However, there is an internal protection circuit that prevents the possible damages that may be occurred from a different sequence of bias applications.

www.rfhic.com

Preliminary
Pulse Amp Pallet
RRP0711020-38



Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RRP0711020-38	August, 2021	0.1	Initial release of datasheet	Preliminary
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives, and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries, and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at +1-919-677-8780. For all other inquiries, please contact the International Sales Team at +82-31-8069-3000.