

## Product Features

- Frequency from 1.2 ~ 1.4GHz
- GaN HEMT
- 50 Ohm Input/Output impedance
- High efficiency

## Applications

- Radar system



## Description

The RRP131K0-10 is designed for Radar system application frequencies from 1.2 ~ 1.4GHz. This module uses GaN HEMT technology which performs high breakdown voltage, wide bandwidth and high efficiency.

Electrical Specifications @  $V_{DS}=50V$ ,  $T=25^{\circ}C$ , 50 $\Omega$  System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	1200	-	1400	$f_o$
Operating Bandwidth	MHz	-	200	-	BW
Output Pulse Power	W	1000	1200	-	$P_o$
Input Pulse Power	dBm	-	7	10	$P_i$
Power Gain	dB	53	54	-	$G_P$
Gain Flatness	dB	-	-	$\pm 1.0$	$\Delta G_P$
Duty Cycle	%	-	-	20	DC
Pulse Width	us	-	-	500	PW
Efficiency	%	40	50	-	$E_{ff}$
Amplitude Pulse Droop	dB	-	0.5	1.0	Droop
Harmonics 1 to N	dBc	30	-	-	$H_N$
Spurious Level	dBc	60	-	-	Spur
Rise Time	ns	-	-	200	$t_r$
Fall Time	ns	-	-	200	$t_f$
Input VSWR	-	-	-	1.5:1	VSWR
Output VSWR	-	-	-	1.5:1	VSWR
Switching Time	us	-	0.5	1	$t_{sw}$
Phase Deviation	$^{\circ}$	-20	-	20	$\Delta\phi$

\* Test Pulse conditions = 100us, 10%

\* Above electrical specifications is measured by connecting electrolytic condenser 10,000uF to DC. Please make sure that electrolytic condenser is connected properly while testing the module.

\* Custom design available

## Absolute Maximum Ratings

PARAMETER	UNIT	RATING	SYMBOL
Operating Junction Temperature	$^{\circ}C$	225	$T_j$
Operating Flange Temperature	$^{\circ}C$	-30 ~ 75	$T_c$
Storage Temperature	$^{\circ}C$	-30 ~ 125	$T_{STG}$

## Operating Voltages


PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Drain-Source Voltage	V	50	± 5%	V <sub>DS1</sub>
Drain-Source Sub Voltage	V	12	± 5%	V <sub>DS2</sub>
Shutdown Voltage	V	TTL Low(0V) : PA ON, TTL High(5V) : PA OFF		V <sub>DC1</sub>
On/Off Control Voltage	V	TTL Low(0V) : PA ON, TTL High(5V) : PA OFF		V <sub>DC2</sub>

## Power Supply

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Drain-Source Current(AVG)	A	-	11	16	I <sub>DS1</sub>
Drain-Source Sub Current(AVG)	A	-	0.12	0.2	I <sub>DS2</sub>

\* Duty Cycle 20%, Pulse Width 200us


## Block diagram

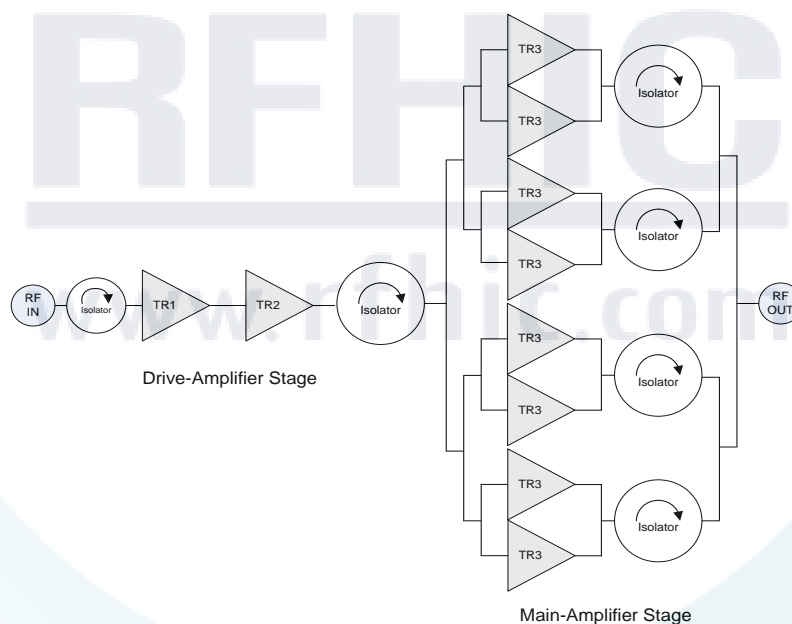

## Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	1.3
Dimension	mm	250 x 150 x 28
RF Connector	-	SMA Female : RF Input
		N-type Female : RF Output
DC Connector	-	3W3 connector : Supply
		9Pin D-Sub : Control

## Outline Drawing

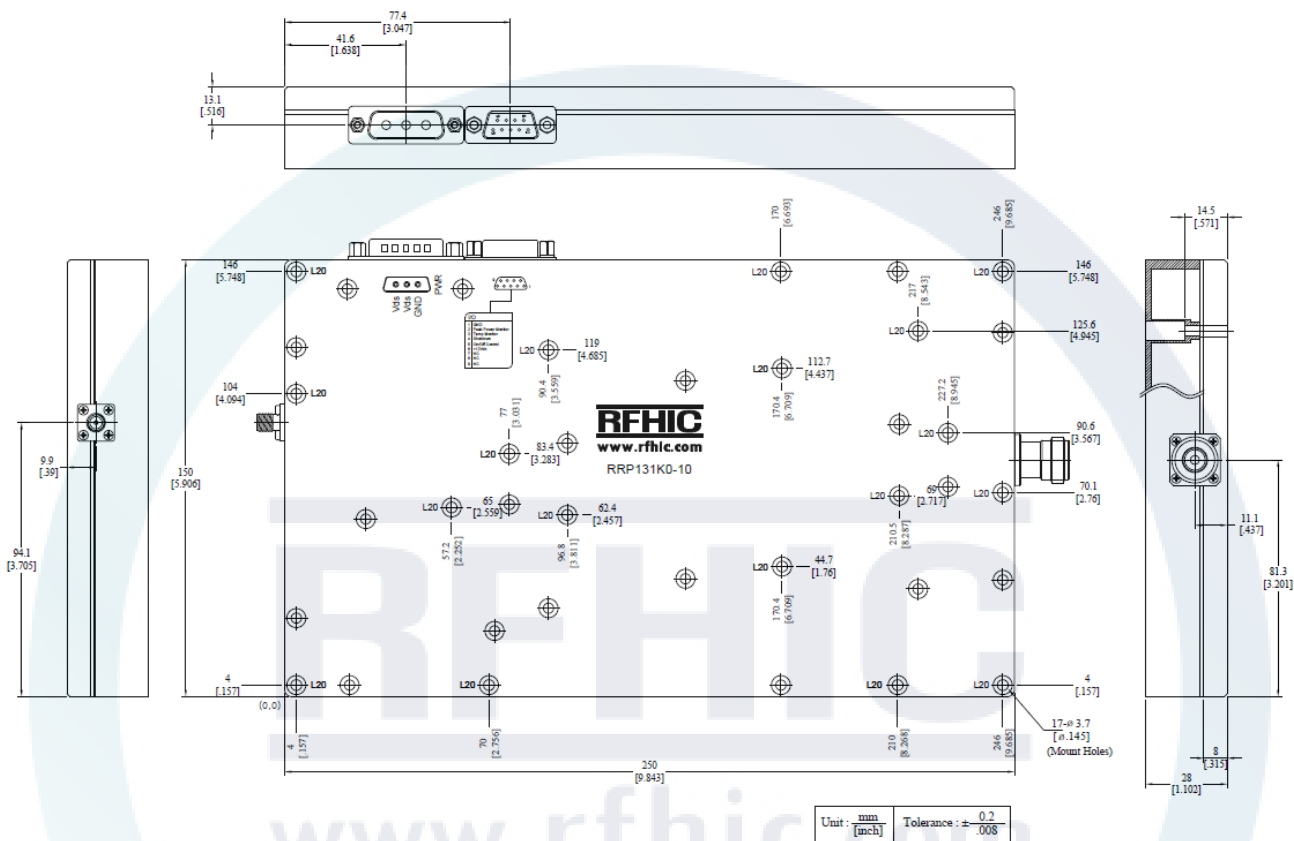\* Unit: mm[inch] | Tolerance  $\pm 0.2[.008]$ 

## Pin Description

Supply : 3W3 Connector			
Pin No	Description	Pin No	Description
A1	GND	A2 & A3	V <sub>DS1</sub> (+50V)
Control : 9Pin D-Sub			
Pin No	Description	Pin No	Description
1	GND	6	V <sub>DS2</sub> (+12V)
2	Peak Power Monitor	7	NC
3	Temp Monitor	8	NC
4	Shutdown	9	NC
5	On/Off Control	-	-

**Revision History**

Part Number	Release Date	Version	Modification	Data Sheet Status
RRP131K0-10	2012.12.28	1.0	Version update	-
RRP131K0-10	2012.9.6	0.1	-	Preliminary



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.