

Product Features

- High Output Power : $P_{out} = 250W$ (Typ.)
- High Gain : $GP = 8dB$ (Typ.)
- High Efficiency : 55% (Typ.)
- High thermal stability
- Internally matched for ease of use
- 20% Duty Cycle, 500us Pulse Width

Applications

- Radar system



Description

The RRP2731200-08 is designed for Radar system application frequencies from 2.7GHz to 3.1GHz and GaN HEMT technology has been used that performs high breakdown voltage, wide bandwidth and high efficiency. Since it is high efficiency amplifier, it can perform at max. 20% duty cycle and 500us of pulse width.




Electrical Specifications @ $V_{DS} = 38V$, $T = 25^{\circ}C$, 50 Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	2700	-	3100	f_O
Operating Bandwidth	MHz	-	400	-	BW
Output Pulse Power	W	200	250	-	P_O
Input Pulse Power	dBm	-	46	-	P_I
Power Gain	dB	7	8	-	G_P
Gain Flatness	dB	-	0.5	1.0	ΔG_P
Duty Cycle	%	-	10	20	DC
Pulse Width	us	-	100	500	PW
Efficiency	%	50	55	-	E_{ff}
Amplitude Pulse Droop	dB	-	0.5	1.0	Droop
Harmonics 1 to N	dBc	20	30	-	H_N
Spurious Level	dBc	60	-	-	Spur
Rise Time	ns	-	-	200	t_r
Fall Time	ns	-	-	200	t_f
Phase Deviation	$^{\circ}$	-15	-	15	$\Delta\phi$

* Above electrical specifications is measured by connecting electrolytic condenser 1,000uF to DC. Please make sure that electrolytic condenser is connected properly while testing the module.

* Custom design available

Typical Performance @ 25°C

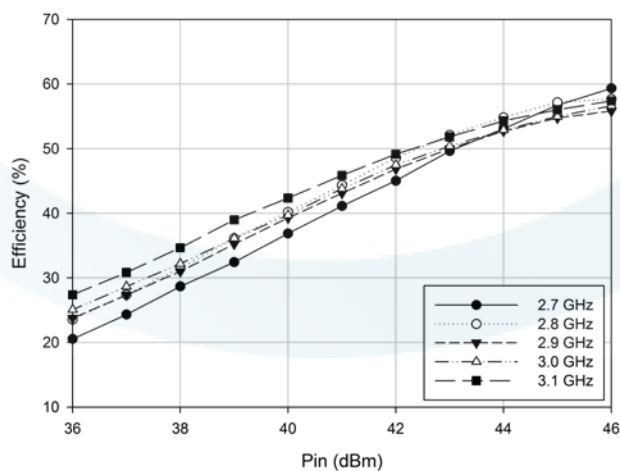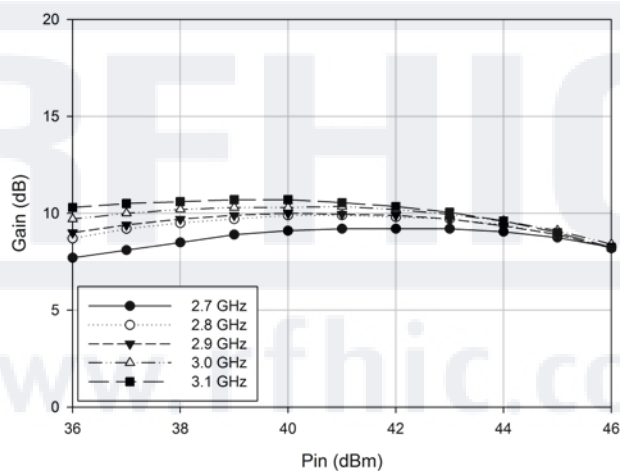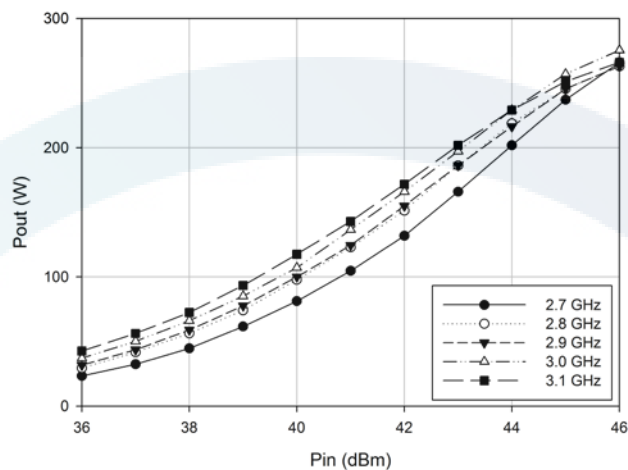

Absolute Maximum Ratings

PARAMETER	UNIT	RATING	SYMBOL
Thermal Resistance	°C/W	0.36	$R_{TH(JC)}$
Operating Junction Temperature	°C	225	T_J
Operating Flange Temperature	°C	-20 ~ 100	T_C
Storage Temperature	°C	-50 ~ 150	T_{STG}

Operating Voltages


PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Drain-Source Voltage	V	38	± 2%	V_{DS}

Power Supply

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Drain-Source Current(AVG)	A	-	-	-	I_{DS}

* Duty Cycle 10%, Pulse Width 100us

Block diagram

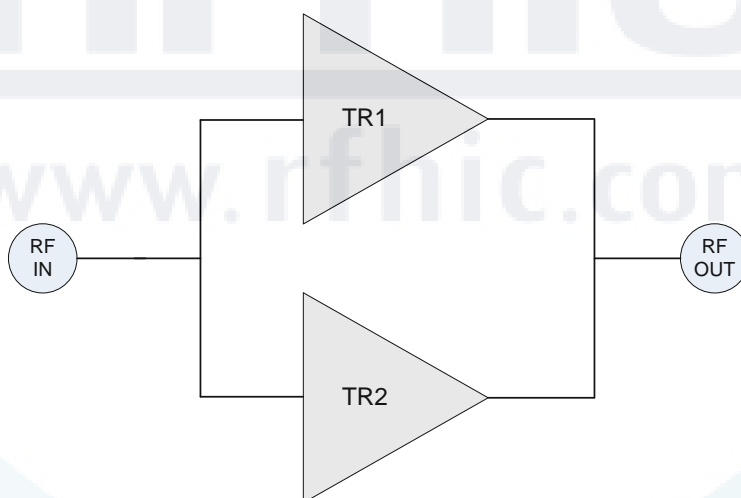


Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	0.03
Dimension	mm	50.8 x 35.8 x 11.1(Tmax.)
RF Connector	-	50 ohm Pad : RF Input
		50 ohm Pad : RF Output
DC Connector	-	DC Pad : V_{DS}

Outline Drawing

Unit : $\frac{\text{mm}}{[\text{inch}]}$	Tolerance : $\pm \frac{0.2}{.008}$
--	------------------------------------

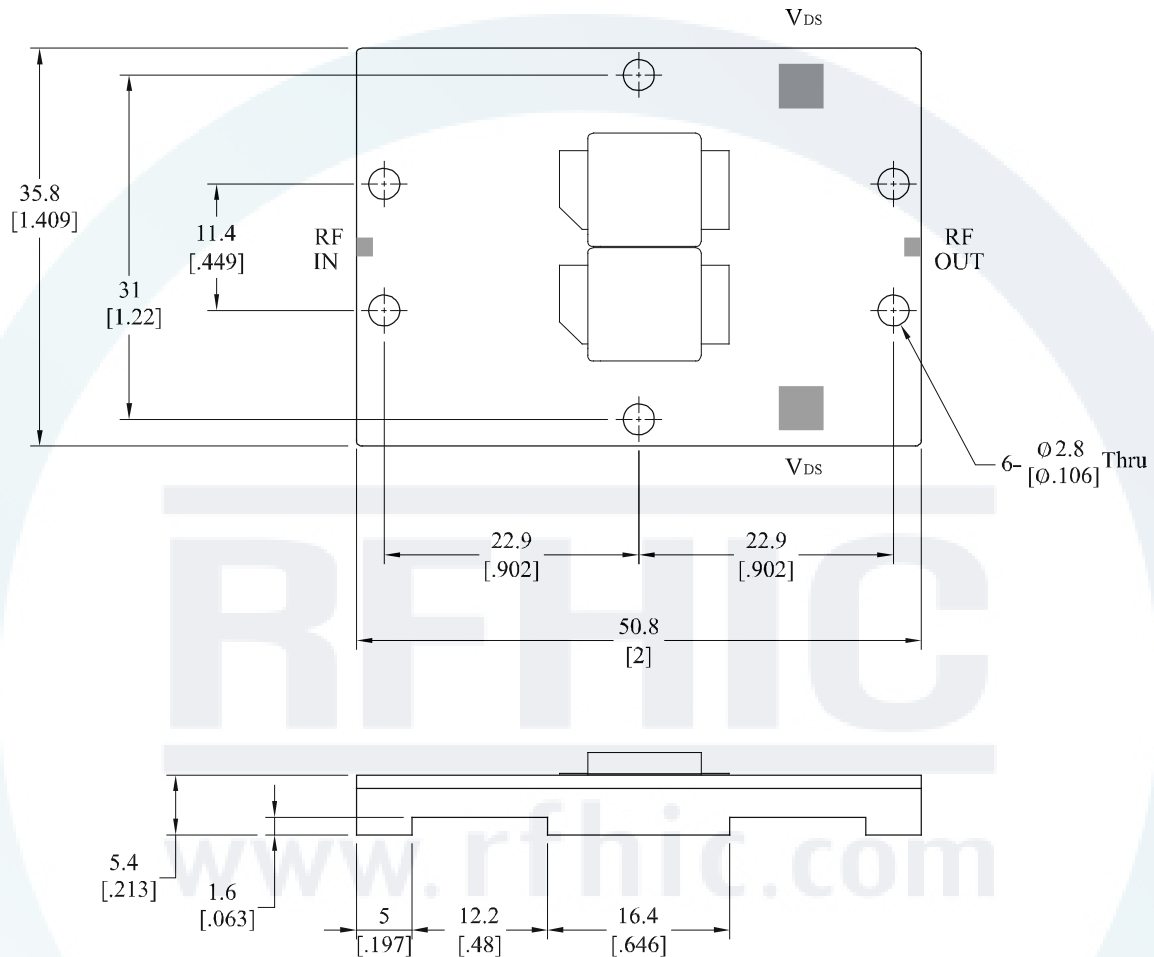

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RRP2731200-08	2014.02.14	0.1	-	Preliminary



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.