

Preliminary

Pulse Amp Pallet

RRP9397400-56A



Product Features

- Frequency from 9.3~9.7GHz
- GaN HEMT
- 50 Ohm Input/Output Impedance
- High Efficiency

Applications

- Radar System



Description

The RRP9397400-56A is designed for Radar system application frequencies from 9.3~9.7GHz. This pallet uses GaN HEMT technology which performs high breakdown voltage, wide bandwidth and high efficiency.

Electrical Specifications @ T=25°C, 50Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	9300	-	9700	f _o
Operating Bandwidth	MHz	-	400	-	BW
Output Pulse Power	W	400	-	-	P _O
Input Pulse Power	dBm	0	+2	+4	P _I
Power Gain	dB	52	54	-	G _P
Gain Flatness	dB	-	-	±1.0	ΔG _P
Duty Cycle	%	-	-	10	DC
Pulse Width	us	-	-	100	PW
PAE	%	20	25	-	E _{ff}
Amplitude Pulse Droop	dB	-	0.5	1.0	Droop
Harmonics 1 to N	dBc	40	-	-	H _N
Spurious Level	dBc	60	-	-	Spur
Rise/Fall Time	ns	-	-	50	t _r / t _f
Off State Isolation	dBc	100	-	-	Off Iso
Input VSWR	dB	-	-	2:1	VSWR
Output VSWR	dB	-	-	2:1	VSWR
Switching Time	ns	-	-	200	t _{sw}
Phase Deviation	°	-20	-	20	Δφ
Operating Voltage(Main)	V	-	50	-	O _{V1}
Operating Voltage(Sub)	V	-	5.6	-	O _{V2}
Power Consumption	W	-	200	250	P _C

* Test Pulse conditions = 100us, 10%

* Custom design available



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

Absolute Maximum Ratings

PARAMETER	UNIT	RATING	SYMBOL
Operating Junction Temperature	°C	225	T _J
Operating Flange Temperature	°C	-30 ~ 75	T _C
Storage Temperature	°C	-50 ~ 125	T _{STG}

Operating Voltages

PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Drain-Source Voltage	V	50	± 2%	V _{DS1}
Drain-Source Sub Voltage	V	5.6	± 2%	V _{DS2}
SSPA On/Off Control Voltage	V	Low(0V) : SSPA OFF, High(5V) : SSPA ON		V _{DC1}
Pulse On/Off Control Voltage	V	TTL Low(0V) : Pulse OFF, TTL High(5V) : Pulse ON		V _{DC2}

Power Supply

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Drain-Source Current (AVG)	A	-	4.0	5.0	I _{DS1}
Drain-Source Sub Current (AVG)	A	-	0.5	1.0	I _{DS2}

* Duty Cycle 10%, Pulse Width 100us

Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	1.4 (TBD)
Dimension (W x L x H)	mm	220 x 120 x 23
RF Connector	-	RF Input : SMA Female
		RF Output : N-type Female
DC/Control Connector	-	7W2 Combo Connector

Preliminary


Pulse Amp Pallet

RRP9397400-56A



Outline Drawing

* Unit: mm[inch] | Tolerance ± 0.3 [.0118]

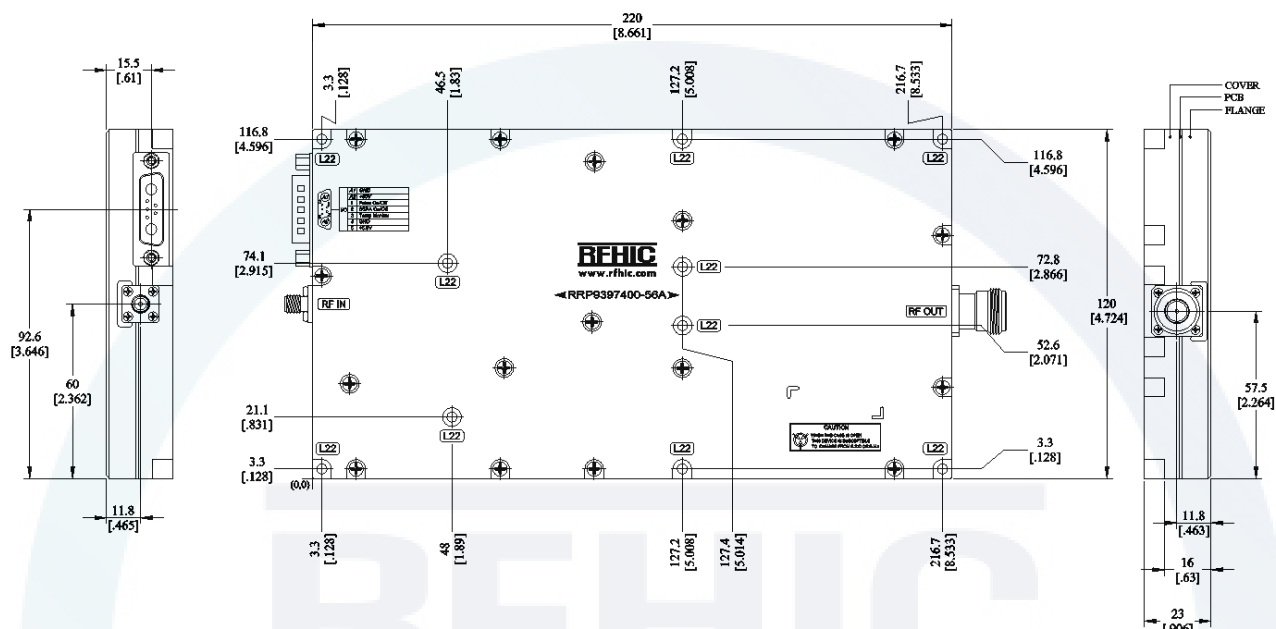

Pin Description

Supply and Control : 7W2 Combo Connector			
Pin No	Description	Pin No	Description
A1	Ground	3	Temp Monitor
A2	V _{DS1} (+50V)	4	Ground
1	TTL Control(Pulse On/Off)	5	V _{DS2} (+5.6V)
2	Enable(SSPA On/Off)		

* Temp Monitor [0.75V/25°C(10mV/°C)]

Preliminary
Pulse Amp Pallet
RRP9397400-56A



Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RRP9397400-56A	2019.09.07	0.1	Initial Release of Datasheet	Preliminary
RRP9397400-56A	2021.10.20	0.2	Changed Outline Drawing & Operating Voltages	Preliminary



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at +1-919-677-8780. For all other inquiries, please contact the International Sales Team at +82-31-8069-3000.