


Product Features

- 4-Way Splitter
- Small size (3X3 mm)
- QFN SMD Type package
- Higher productivity
- Lower manufacturing cost
- -63dBc CSO 135 Channels @ +15dBmV/ch
- -77dBc CTB 135 Channels @ +15dBmV/ch
- -78dBc XMD 135 Channels @ +15dBmV/ch
- 5.2 dB Typical Noise Figure
- 75 ohm input and outputs

Application

- Multi Tuner Set-Top Boxes
- Home Gateways
- FTTx (G-PON, GE-PON)



Package : QFN 3X3

Description

AD412 is designed as low cost Active Divider for many applications including FTTH, CATV System.

This MMIC is based on Gallium Arsenide Enhancement Mode pHEMT which shows low current draw and very low noise.

The data in this spec sheet is valid only for 75 ohm application.

Specifications

PARAMETER		UNIT	MIN	TYP	MAX	Condition
Frequency		MHz	30 ~ 1000			-
Gain		dB	5	6	-	-
Gain Flatness		dB	-	0.4	1	-
Input Return Loss		dB	-	-10	-	-
Output Return Loss		dB	-	-12	-	-
IN&OUT Port Isolation		dB	-	-26	-	-
OUT&OUT Port Isolation		dB	-	-29	-	-
Output IP3		dBm	30	33	-	-
1dB Compression Point		dBm	16.3	18.3	-	-
Noise Figure		dB	-	5.2	6	-
CSO	30 ~ 870MHz	dBc	-	-63	-60	135 channel @ Input Power +15dBmV/ch
CTB		dBc	-	-77	-70	
XMOD		dBc	-	-78	-70	
DC Current		mA	-	220	-	Vdd = 5.0V


NOTE

1. Test conditions unless otherwise noted. Test Freq = 500MHz, T=25°C, Vdd=5V, 75Ω system
2. OIP3 measured with 2 tones at an output power of +0dBm/tone separated by 1MHz, Test Freq = 500MHz


Absolute Minimum and Maximum Ratings

PARAMETER	UNIT	MIN	TYP	MAX
Device Voltage	VDC	-	+5	+5.5
Operating Temperature	°C	-40	-	+85
Storage Temperature	°C	-40	-	+150


Application Circuit: 30~ 1000MHz, 5v, 75ohm System

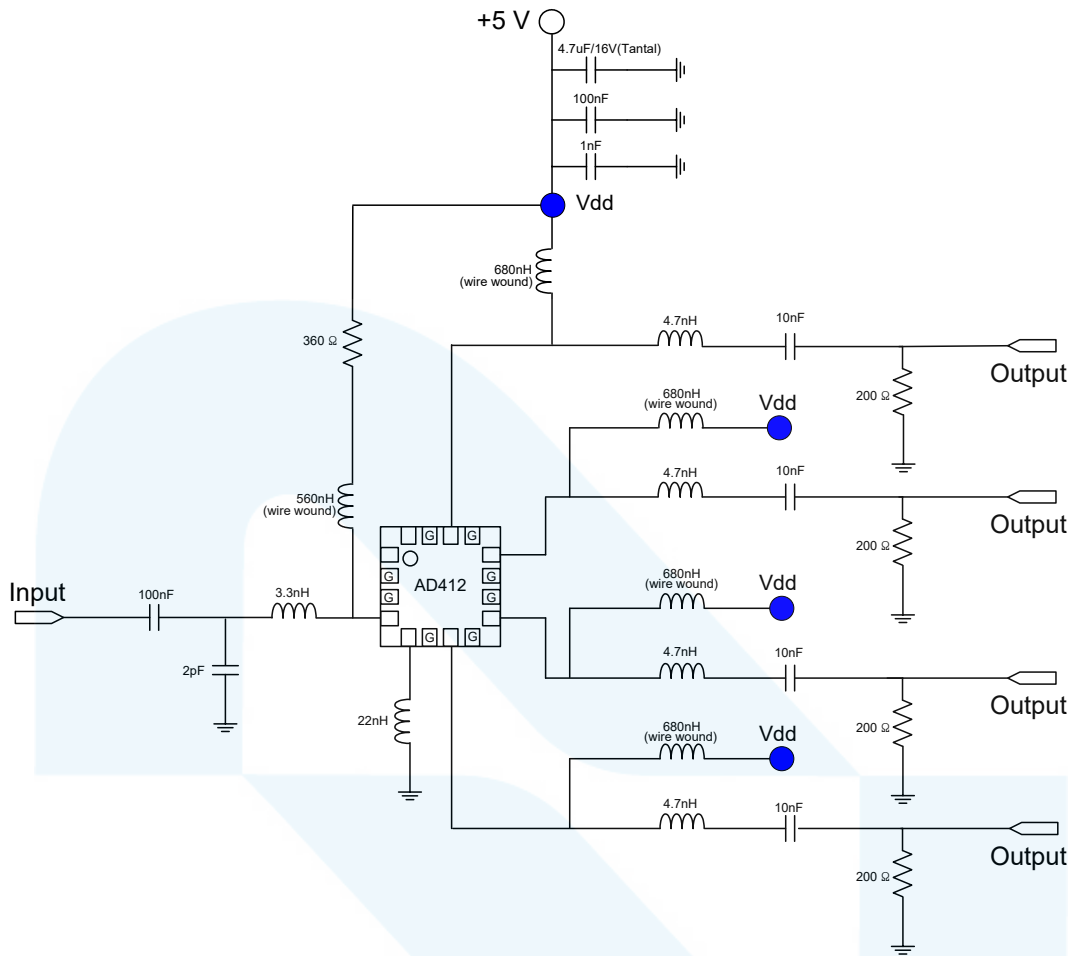

S-Parameter

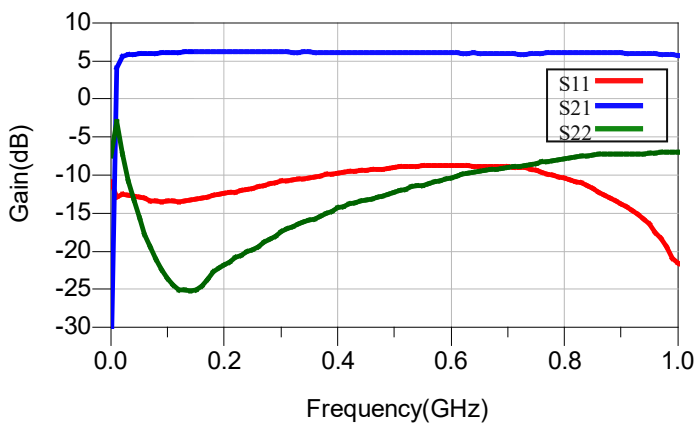

Isolation

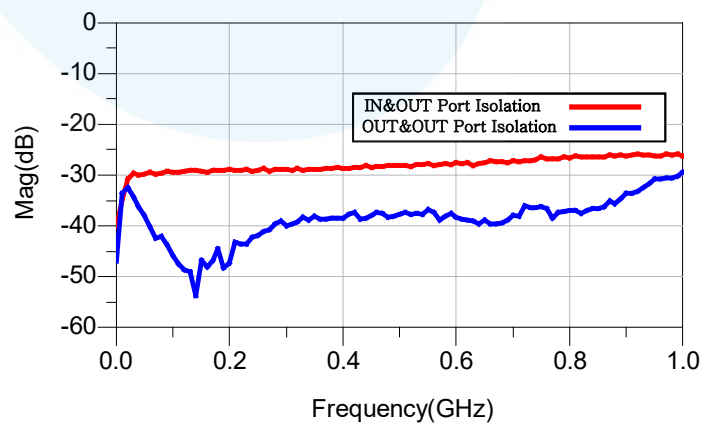


Multi-Tone Test 135CH_FLAT@Input Power +15dBmV/Ch

Level: Input +15dBmV		Tilt: 135CH								
FRQ	XMD(NCTA)	CTB_RAW	CTB_COR	N-FLR	CSU_RAW	CSU_COR	CSU_FRQ	CSL_RAW	CSL_COR	CSL_FRQ
55.25	80.2	81	85.4	81.7	79.2	82.8	56	66.2	66.3	53.99
77.25	81.2	81.3	85.7	82.2	67	67.1	77.99	81.7	86	76.58
109.25	80.3	81.6	85.9	82.5	79.7	82.7	109.99	67.8	67.9	107.99
211.25	80	80.7	85	81.9	74.4	75.2	212.5	69.1	69.3	209.99
331.25	79.8	79.4	83.8	80.7	70.4	70.8	332.5	70	70.4	329.99
445.25	78.9	79.8	84.1	81.3	69.1	69.4	446.5	72	72.6	443.99
547.25	80	78.7	83	80	65.9	66	548.49	72.7	73.7	545.99
637.25	79.8	78.6	83	80	66.1	66.3	638.5	75.3	77.2	635.99
745.25	78.9	78.5	82.9	79.8	65.1	65.3	746.49	76.9	79.9	744.48
859.25	78.6	77.1	81.4	77.8	63.7	63.9	860.49	74.6	77.1	858.49
Min	78.6	77.1	81.4	77.8	63.7	63.9	56	66.2	66.3	53.99
Max	81.2	81.6	85.9	82.5	79.7	82.8	860.49	81.7	86	858.49


© Specifications (Insert Pad)

Parameter	Unit	Typical Data	Condition
Frequency	MHz	30~1000	-
Supply Voltage	V	5	-
Gain	dB	4.3	-
Gain Flatness	dB	0.3	-
Input Return Loss	dB	-10	-
Output Return Loss	dB	-15	-
IN&OUT Port Isolation	dB	-27	-
OUT&OUT Port Isolation	dB	-30	-
OIP3	dBm	30	-
P1dB	dBm	16	-
Noise Figure	dB	5.2	-
CSO	dBc	-64	135 channel, +15dBmV/ch
CTB	dBc	-74	135 channel, +15dBmV/ch
XMOD	dBc	-78	135 channel, +15dBmV/ch
DC Current	mA	220	Vdd = 5.0V


Application Circuit: 30~ 1000MHz, 5v, 75ohm System (Insert Pad)

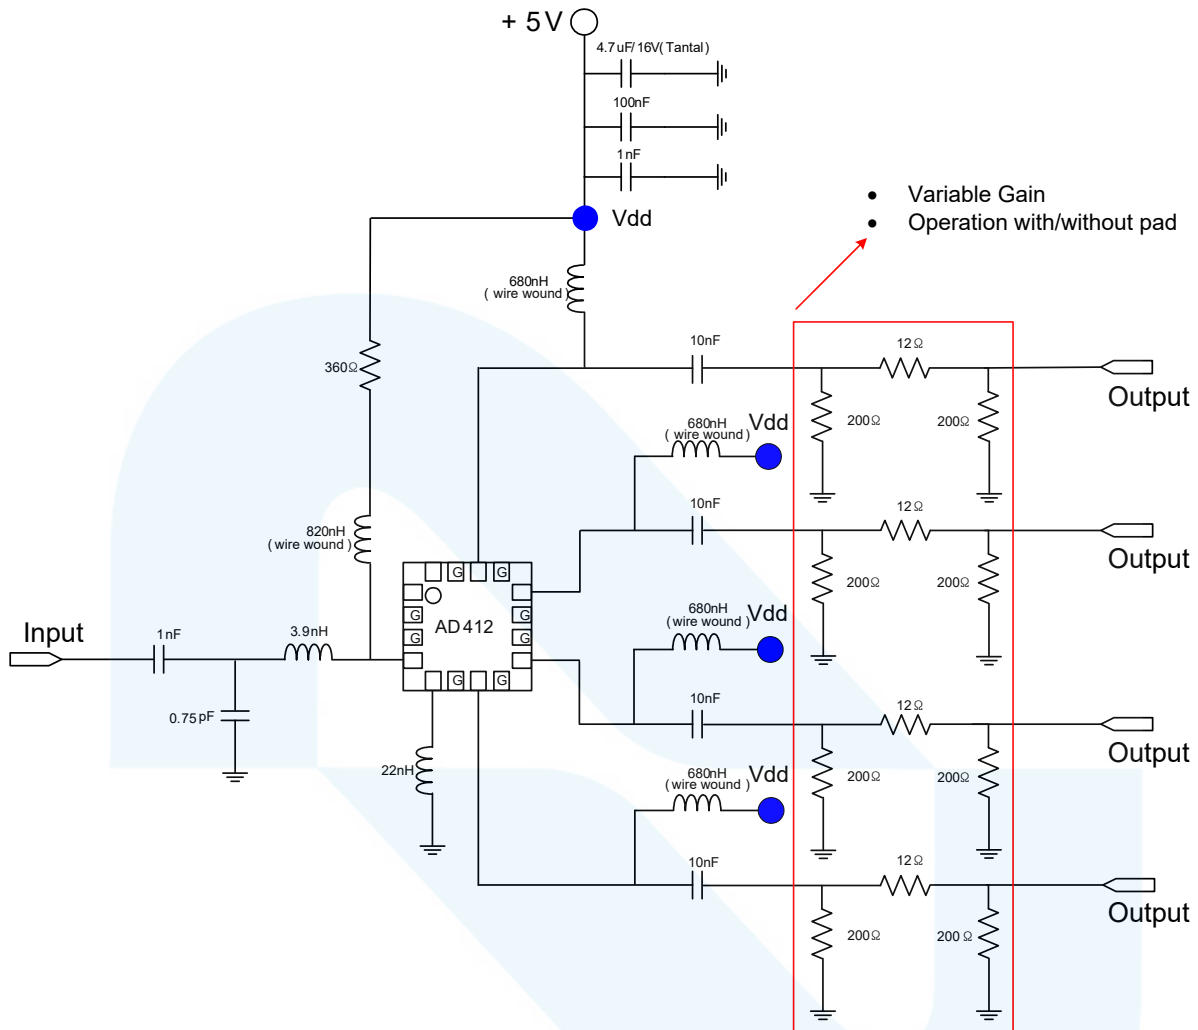

S-Parameter

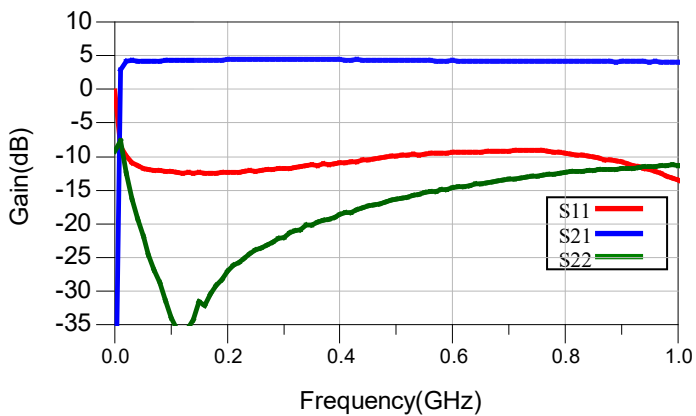


Isolation

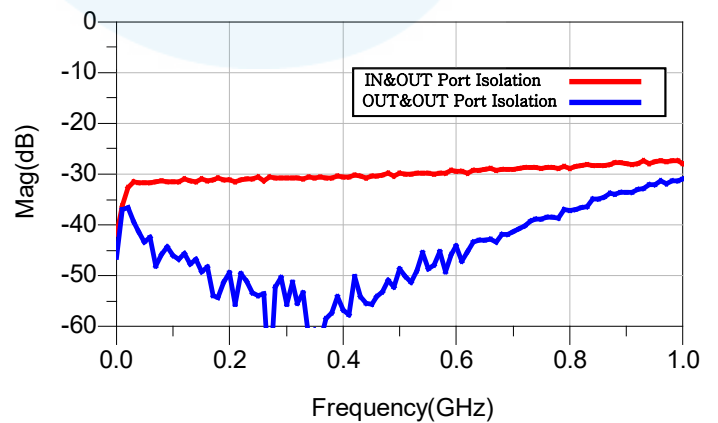

Multi-Tone Test 135CH_FLAT@Input Power +15dBmV/Ch

Level: +15dBmV		Tilt: 135CH_FLAT								
FRQ	XMD(NCTA)	CTB_RAW	CTB_COR	N-FLR	CSU_RAW	CSU_COR	CSU_FRQ	CSL_RAW	CSL_COR	CSL_FRQ
55.25	78.1	79.1	83.4	79.7	77.4	81.8	55.99	64.6	64.8	54
77.25	78.8	79.1	83.4	79.8	66	66.2	78	79.5	83.8	76.38
109.25	78	79.4	83.7	80.3	78.3	82.6	109.99	65.8	66	108
211.25	79.2	78.6	83	79.5	74.4	76.1	212.5	66.7	67	209.99
331.25	80.5	77.6	81.9	78.4	70.1	70.7	332.49	65.8	66.1	329.99
445.25	81.9	78.3	82.6	79.3	68.7	69	446.49	67.4	67.7	443.99
547.25	83	77	81.3	77.8	66.5	66.9	548.5	67.1	67.5	545.99
637.25	85.7	76.8	81.1	77.9	66.3	66.6	638.5	69.3	70	635.99
745.25	87.3	76.3	80.7	77	64.9	65.1	746.49	72.8	74.7	743.99
859.25	91	74.6	78.9	75.6	64	64.3	860.49	73.9	78.3	858.49
Min	78	74.6	78.9	75.6	64	64.3	55.99	64.6	64.8	54
Max	91	79.4	83.7	80.3	78.3	82.6	860.49	79.5	83.8	858.49

Package Dimensions (Type :QFN3X3)

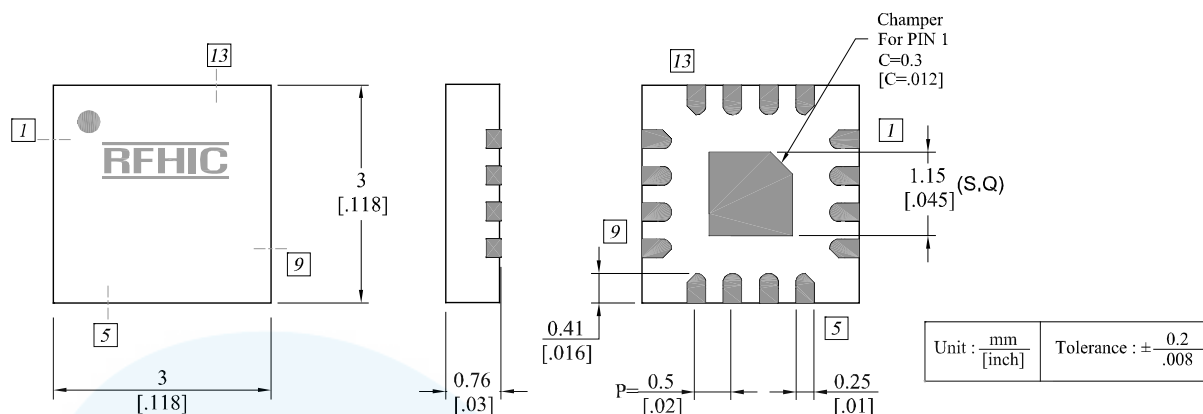

Pin No	Function
4	Input
5	Input Matching
7	Output - 1
9	Output - 2
12	Output - 3
14	Output - 4
2, 3, 10, 11	GND
Other	NC



Certification

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>.