

## Product Features

- 30 ~ 2200MHz
- GaAs E-pHEMT MMIC
- Higher linearity, Higher Gain
- Low Noise Figure
- High Max input power
- SOT-89 SMD Type package
- Higher productivity
- Lower manufacturing cost
- Pb Free / RoHS Standard

## Applications

- Receiver IF Amplifier
- Cellular, GSM, RFID
- Base station
- RF Sub-system
- CATV, Tetra, Satellite system



Package Type : SOT-89

## Description

AE366 is a drive or pre-drive amplifier designed in a low cost SOT-89 package.

This MMIC is based on Gallium Arsenide Enhancement Mode pHEMT which shows low current and high IP3.

It is designed as driver devices for infrastructure equipment in the 30~2200MHz Wireless technologies such as IF, Cellular, GSM System. The data in this spec sheet is valid only for 50ohm application.

## Electrical Specifications

PARAMETER	UNIT	MIN	TYP	MAX	REMARK
Operating Frequency( $f_o$ )	MHz	30	-	1000	-
Small Signal Gain( $S_{21}$ )	dB	21.5	22.5	-	@ 100MHz
Input Return Loss( $S_{11}$ )	dB	-	-16	-	-
Output Return Loss( $S_{22}$ )	dB	-	-20	-	-
Output IP3(OIP3)	dBm	-	37.5	-	@ 100MHz
1dB Compression Point( $P_{1dB}$ )	dBm	19	22	-	
Noise Figure(NF)	dB	-	1.6	2.2	-
DC Current	mA	-	90	-	-
Supply Voltage	V	-	5	-	-



### Note

1. Test conditions unless otherwise noted. Freq=30~1000MHz, Vdd=+5V, T=25℃, 50Ω system
2. OIP3 measured with 2 tones at an output power of +10dBm/tone separated by 1MHz

## Absolute Maximum Ratings

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Device Voltage	V	-	5	7	-
Operating Temperature	℃	-40	-	85	-
Storage Temperature	℃	-40	-	150	-
ESD Human Body Model	-	-	Class 1A	-	-
Moisture sensitivity Level	-	-	MSL1	-	-

## Application Circuit @ 30 ~ 1000MHz, 50ohm System

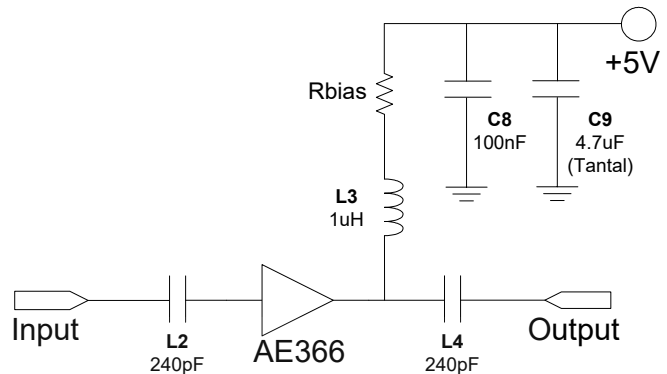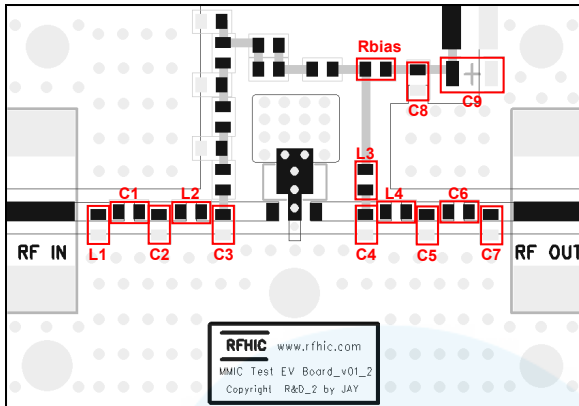

EVB BOM

Description	Reference Designator	Manufacturer	Manufacturer's P/N
CAP, 240pF, 1608	L2, L4	Murata	GRM1885C1H241JA01D
CAP, 100nF, 1608	C8	Murata	GRM188R71C104KA01D
CAP, 4.7uF, 3216-18	C9	AVX	TAJA475M016RNJ
IND, 1uH, ±10%, 2520, W/W	L3	Taiyo Yuden	LEM2520T1R0J
RES, 00hm, 1608	C1, C6, Rbias	ROHM	MCR03 EZPJ000
DNP	L1, C2, C3, C4, C5, C7	-	-

## Typical Performance


PARAMETER	UNIT	TYPICAL	REMARK
Operational Frequency Range	MHz	30 ~ 1000	-
Small Signal Gain(S21)	dB	22.5	@ 100MHz
Input Return Loss(S11)	dB	-16	-
Output Return Loss(S22)	dB	-20	-
Output IP3(OIP3)	dBm	37.5	@ 100MHz
1dB Compression Point(P1dB)	dBm	22	
Noise Figure(NF)	dB	1.6	-
DC Current	mA	90	-
Supply Voltage	V	5	-

## Note


- Test conditions unless otherwise noted. Freq=30~1000MHz, Vdd=+5V, T=25℃, 50Ω system
- OIP3 measured with 2 tones at an output power of +10dBm/tone separated by 1MHz

Typical Performance @ VDD=5V, IDS=90mA, T=25°C, 50ohm System


Gain vs Frequency

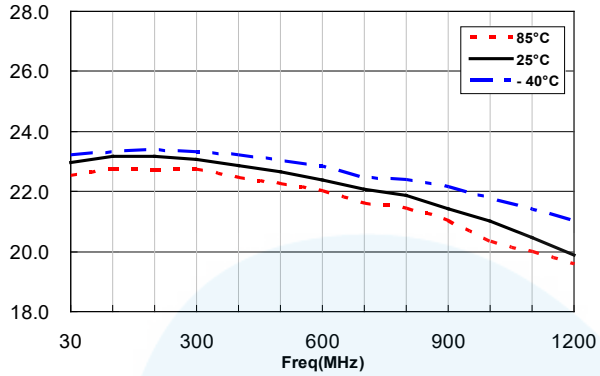


Isolation vs Frequency

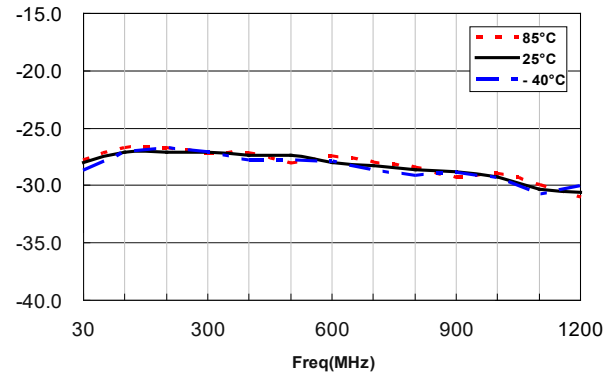


Input R/L vs Frequency

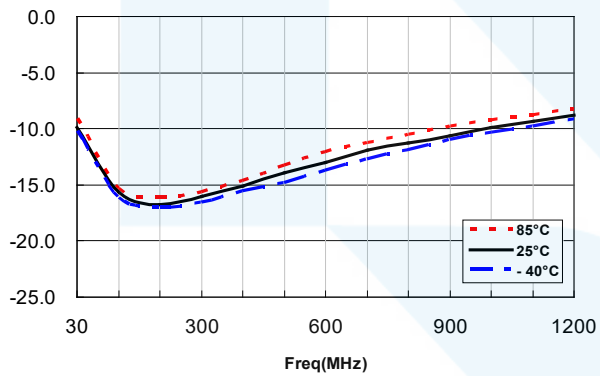


Output R/L vs Frequency

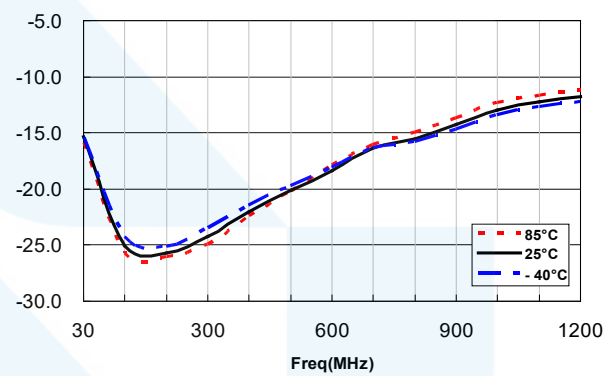

Noise Figure vs Frequency

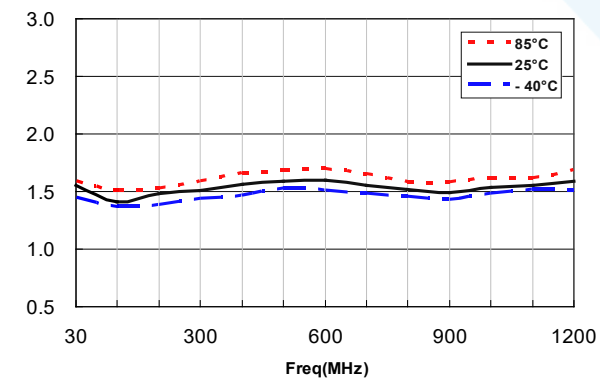


OIP3 vs Frequency

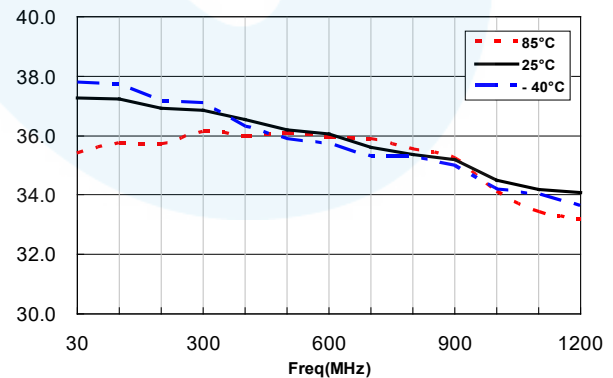


## Package Dimensions (Type: SOT-89)

\* Unit: mm[inch] | Tolerance  $\pm 0.2$ [.008]

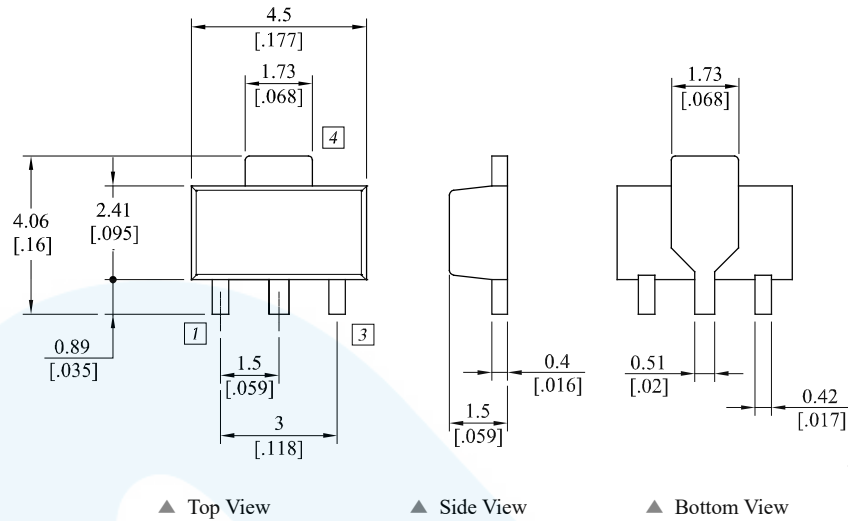


Pin Description			
Pin No	Function	Pin No	Function
1	Input	4	GND
2	GND		-
3	Output / Bias		-

## Recommended Pattern

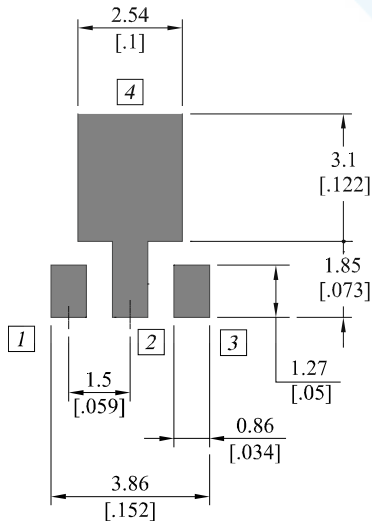

## Recommended Mounting Configuration

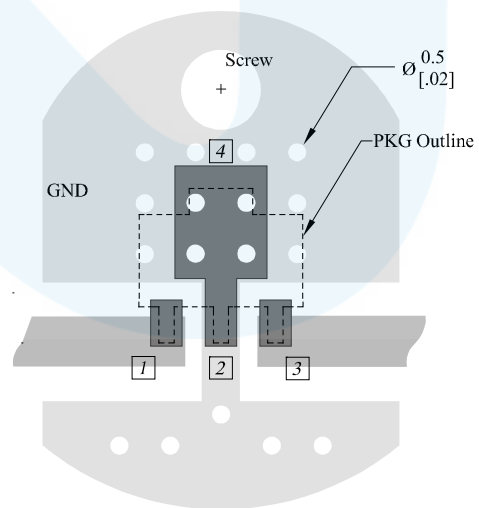

### \* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

**Revision History**

Part Number	Release Date	Version	Modification	Data Sheet Status
AE366	2012.10.15	1.2	New datasheet format	-
AE366	2010.12.27	1.1	FIXED : Operating Frequency Range	-
AE366	2010.2.18	1.0	Initial Release.	-

**Certification**

This product is manufactured by a company that is certified for the AS9100D quality management system.

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>.