

Product Features

- GaN on SiC Technology
- High Efficiency
- 50 Ohm Input/Output Impedance
- 6BIT phase and attenuation control

Application

- C-Band Radar

**Description**

- RFMR57-CTRM-020SP-500A-SM is T/R Module (Transmitter/Receiver Module) operating at 5.4-5.9GHz performing 20W output power.
- Circulator provides duplexer function and has a built in Limiter Diode which protects receiver.
- 6-Bit Phase Shifter and Attenuator are controlled by serial data.
- Bias sequencing is required.

Electrical Specifications @ Ta=25°C, 50Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Frequency	GHz	5.4	-	5.9	F
Peak Output Power	W	20	-	-	P _{OUT}
Transmit Gain Flatness	dBp-p	-	-	2.0	ΔG _p
Transmit input Power	dBm	-	4	-	P _{IN}
Pulse width	us	-	-	50	P _w
Duty Cycle	%	-	-	10	D _c
Pulse droop	dB	-	-	1	Droop
Pulse Rise & Fall time	ns	-	-	100	T _r / T _f
Transmit Harmonics 1 to N	dBc	20	-	-	H _N
TX Input & RX Input Return Loss	dB	-	-	-12	RL
Receiver Gain	dB	-	25	-	G _r
RX Gain Flatness	dBp-p	-	-	2	G _f
RX Noise Figure	dB	-	3.5	-	N
Receiver output 1dB compression	dBm	+1	-	-	R _{p1}
Gain Variation with phase control	dB	-	-	2.5	A _v
Digital attenuator RMS error	dB	-	-	2.0	A _E
Digital Phase shifter RMS error	deg	-	-	5	P _E
Tx/Rx switching time	ns	-	-	500	T _s
Efficiency	%	30	-	-	E _{ff}
Digital Attenuator	-	6 BIT, LSB=0.5dB, 0 ~ 31.5dB			AT
Digital Phase shifter	-	6 BIT, LSB=5.625°, 0 ~ 354.625°			PS
Operating Voltage	-	DC +45V, DC+5.0V, DC -2.7V			V

Environmental Specifications

Operating Flange Temperature	-10 °C to +50 °C
------------------------------	------------------


Mechanical Specifications

Physiacl Dimension (W × D × H)	26.5mm X 124.5mm X 14mm
DC & Control signal Connector	Pin Header (2 X 9 18pin, 2mm pitch)
RF Connector	SMA / SMP Connector


Interface

No	Function	Description
1	Data	Core Chip Data (TTL)
2	DC -2.7V	Core Chip Vcc
3	Clock	Core Chip Clock(TTL)
4	TX Path Enable	TX Path Control(TTL) Low : On, High : Off
5	Enable	Core Chip Latch Enable(TTL)
6	RX Path Enable	RX Path Control(TTL) Low : On, High : Off
7	TX Input S/W Control	TX Input Switch Control (TTL) Low : Path, High : Termination
8	DC +5.0V	Drive Amp Voltage
9	NC	NOT Connect
10	Temp Sensor	0.4V ~ 1.2V (-15°C ~ +65°C)
11	GND	Ground
12	NC	NOT Connect
13	GND	PA Gate Control
14	HPA Gate Voltage	-3.4V : ON , -8V : OFF
15	GND	Ground
16	GND	Ground
17	DC +45V	HPA Drain Voltage
18	DC +45V	HPA Drain Voltage

Block Diagram

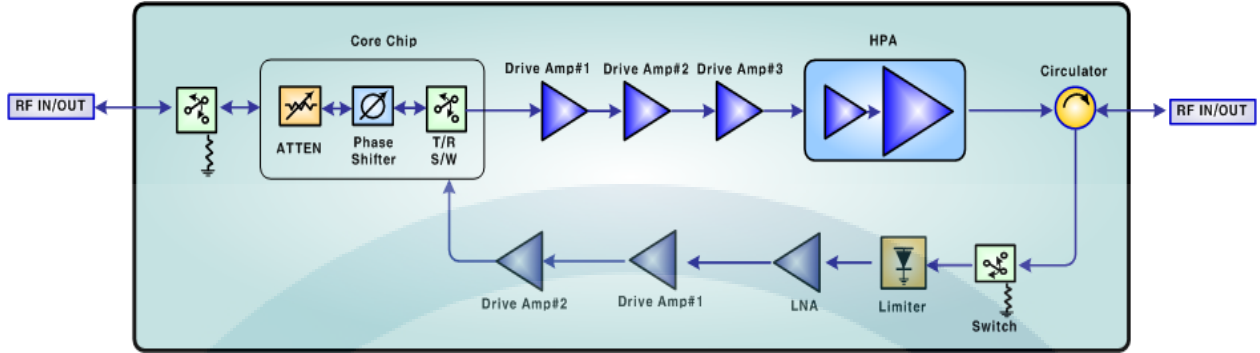

Drawing

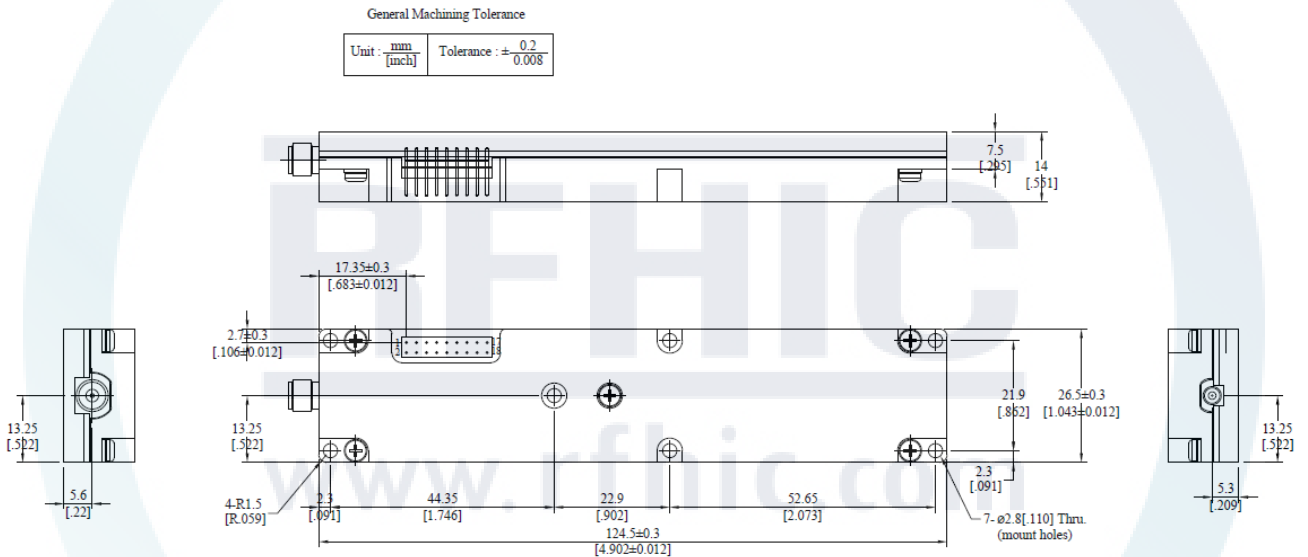

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RFMR57-CTRM-020SP-500A-SM	2017.06.01	0.1	-	-
RFMR57-CTRM-020SP-500A-SM	2017.06.15	0.2	1. Transmit input Power 2. Drawing	-



RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.