

Product Features

- GaN on SiC MMIC
- Very Low Distortion
- Guaranteed Broadband Power Gain
- Heat Sink 99.9% Copper, Ag or Gold Plate
- Excellent Thermal Conductivity
- Single Supply Voltage @ 24V
- No External Circuit needed

Applications

- Drive Amplifier



Package Type : SOT-115J

Description

The RFC1G21H4- 24-S is specifically designed for up to 1GHz in frequency as amplifiers. This hybrid dynamic range amplifier module operates with a single voltage supply of 24V(DC). The RFC1G21H4- 24-S is equipped with over-voltage suppressor.

Electrical Specifications @ $V_{CC} = 24V$; $T_c = 45^\circ C$; $Z_S = Z_L = 50\Omega$

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency	MHz	20	-	1000	-
Small Signal Gain	dB	20.0	21.0	-	20 ~ 1000MHz
Gain Variation vs Frequency	dBpp	-	1.5	2.0	20 ~ 1000MHz
Input/Output Return Loss	dB	-	-10	-7	20 ~ 1000MHz
P3dB	dBm	35.0	36.0		20 ~ 1000MHz
OIP3 @ $P_o = +23dBm$ (1MHz Tone spacing, CW 2-Tone)	dBm	43.0	44.0	-	20 ~ 1000MHz
Supply Voltage	V		+24	+25	$V_{cc}(=V_{ds})$
Quiescent Current consumption	mA	-	550	600	-

Absolute Maximum Ratings

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Input RF Power	dBm	-	-	22	-
Supply Voltage	V	-	-	30	-
Load Mismatch Value	3 : 1 @ all load phase				
Operating Case Temperature	$^\circ C$	-20	-	80	T_c
Storage Temperature	$^\circ C$	-40	-	105	T_{stg}


Note

1. To protect the unit, Supply Voltage under 18V, the unit will be switched off.


Typical Performance @ 25°C

PARAMETER	UNIT	Typical Performance		
Frequency	MHz	20	500	1000
Small Signal Gain	dB	21	21	22
Input Return Loss	dB	-10	-13	-13
Output Return Loss	dB	-17	-11	-8
P3dB	dBm	36	39	37
OIP3	dBm	45	47	44
Supply Voltage	V	-	24	-
Quiescent Current consumption	mA	550		


S-Parameters

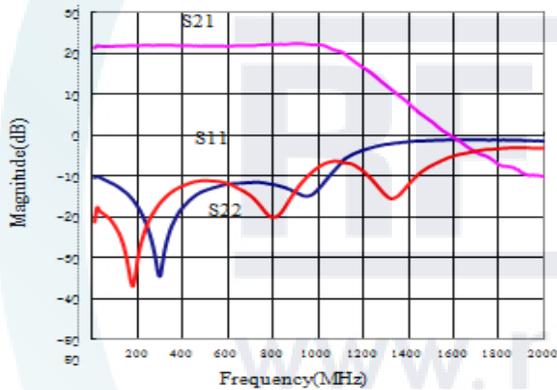


Power Output 3dB Compression

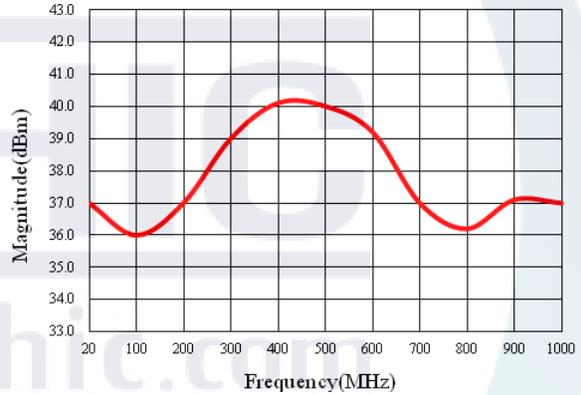


2nd Harmonic @ Po 30dBm

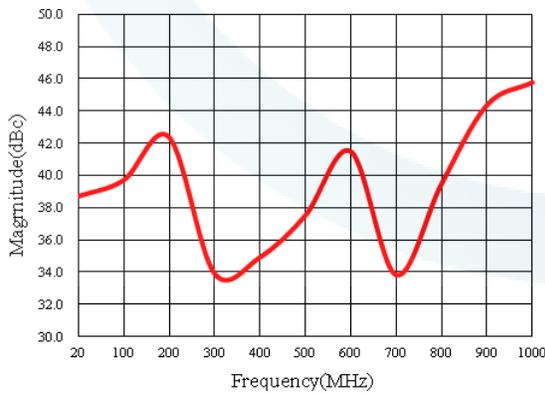

OIP 3 @ Po 23dBm


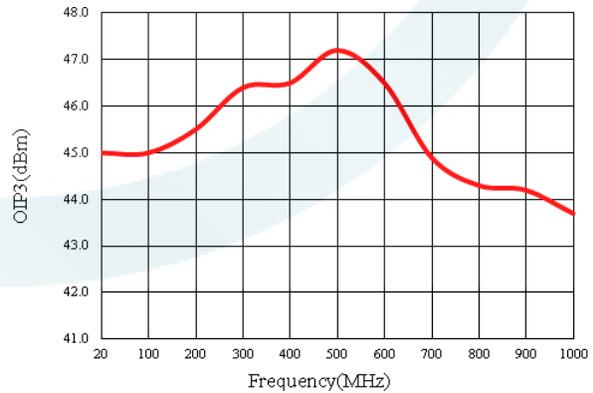


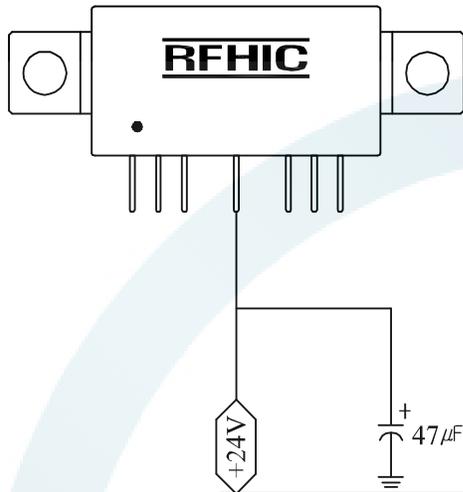Note for Correct Use

1. On the power input port (Pin#5), 47uF/35V capacitor GND is recommended.
2. Heat sink should be placed as tight as possible to the metal case.
3. Pay attention when handling electrostatic-sensitive devices.
 - Person at a workbench should be earthed via a wrist strap and a resistor.
 - All mains-powered equipment should be connected to the mains via an earth-leakage switch.
 - Equipment cases should be grounded.
 - Relative humidity should be maintained between 40% and 50%.
 - An ionizer is recommended.
 - Keep static materials, such as plastic envelopes and plastic trays etc., away from the workbench.
4. One must put the power off, before adjusting the in/output matching of the system.
5. Pay close attention to the input voltage not to over power the hybrid.
6. Do not open the Plastic cover to change the matching inside the hybrid.

RFHIC
www.rfhic.com

Package Dimensions (Type: SOT-115J)

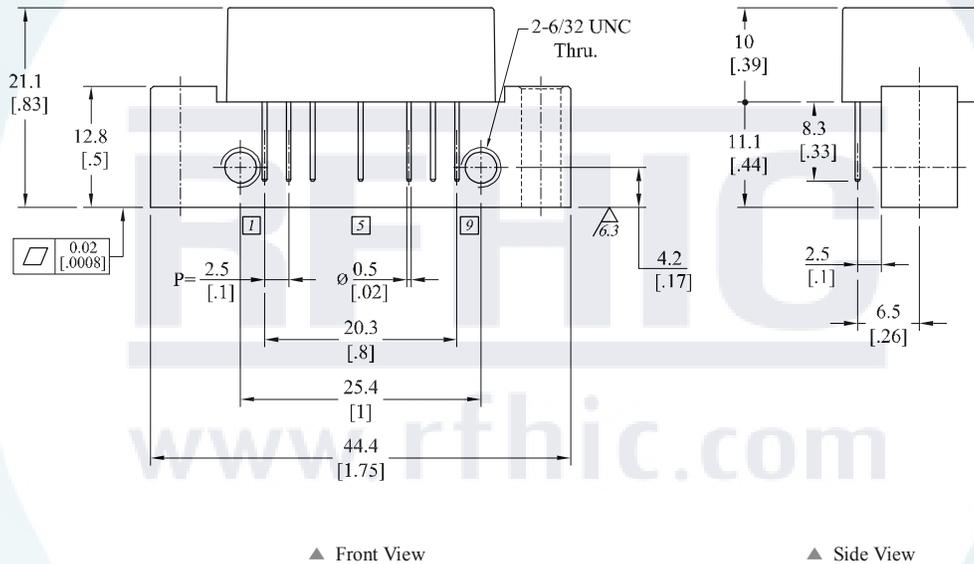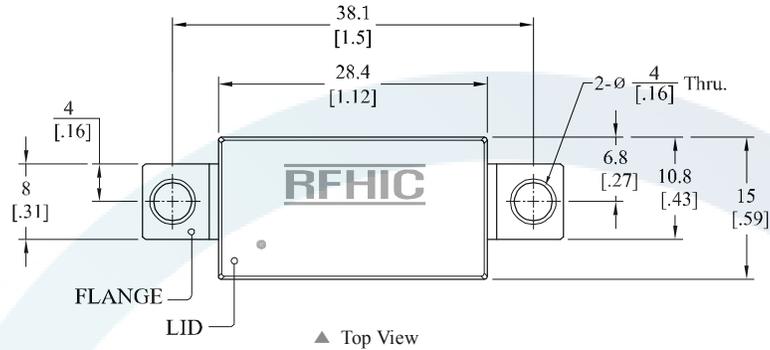* Unit: mm[inch] | Tolerance: ± 0.2 [.008]

Pin Description

Pin No	Function	Pin No	Function	Pin No	Function
1	RF Input	4	-	7	GND
2	GND	5	Vcc	8	GND
3	GND	6	-	9	RF Output

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RFC1G21H4-24-S	2015.3.20	1.5	Absolute Maximum Ratings	-
RFC1G21H4-24-S	2012.11.6	1.4	Electrical Specifications modification	-
RFC1G21H4-24-S	2012.9.5	1.3	-	-



RFHIC
www.rfhic.com

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.